



TECHNICAL INFORMATION BULLETIN

Metal Halide

Order Code: **58233**

Description: **MP250/BU/PS EYE**

ANSI Code: M138, M153/O

Features:

- High Output, Position Oriented Metal Halide
- High initial and maintained lumens
- Superior lamp to lamp color consistency
- Pulse Start Performance

PERFORMANCE DATA

Initial lumens at rated watts after 100 hours operation	23800	lm
Mean lumens at 10 hours/start	19000	lm
Rated average life at 120hrs/start	NA	h
Rated average life at 10hrs/start	15000	h
Warm up time, typical	2-3	min
Correlated color temperature	4000	K
CIE chromaticity	0.385, 0.390	X, Y
Color rendering index (Ra)	65	
Operating Position	Base Up	
Time to hot re-start, typical	4-6	min

ELECTRICAL CHARACTERISTICS





Nominal lamp wattage	250	W
Nominal lamp voltage	133	V
Nominal lamp current	2.1	A _{rms}
Maximum current crest factor	1.8	-
Maximum starting current	3.2	A _{rms}
Minimum starting current	2.1	A _{rms}
Ballast requirements	Use with ballast rated for ANSI M138/M153/O lamp	
Open circuit voltage -30°C (-22°F)	254	V _{rms}
	345	V _{peak}
Igniter requirements	Ignitor	
Minimum pulse height	3.0	kV
Maximum pulse height	4.0	kV
Minimum pulse width	1@ 2.7	us@kV
Minimum pulse repetition rate	1	Per half cycle
Pulse position(s)	64°-110°, 244°-290°	°(cycle)

PHYSICAL DESCRIPTION

Maximum overall length	211 (8.31)	mm (in)
Light center length	127 (5.0)	mm (in)
Bulb diameter	89 (3.5)	mm (in)
Max. base - bulb eccentricity	3	Degrees
Maximum base temperature	210 (410)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	ED28	
Bulb material	Lead-free Borosilicate (Hard Glass)	
Arc tube material	Quartz	
Effective arc length	30.1	mm (in)
Bulb finish	Clear	
Base designation	EX39 Mogul	
Base finish	Nickel plated	

FIXTURE REQUIREMENT

O Rated - Open fixture Permissible.

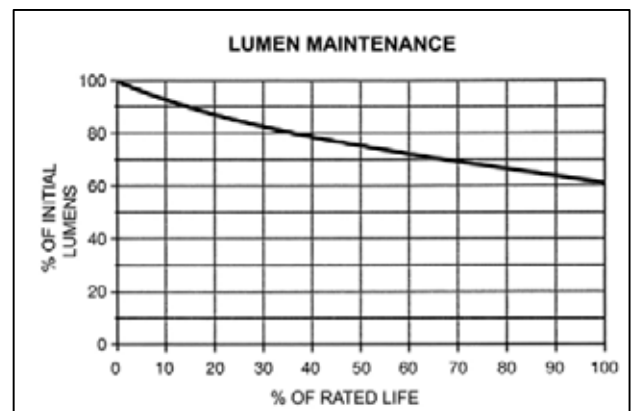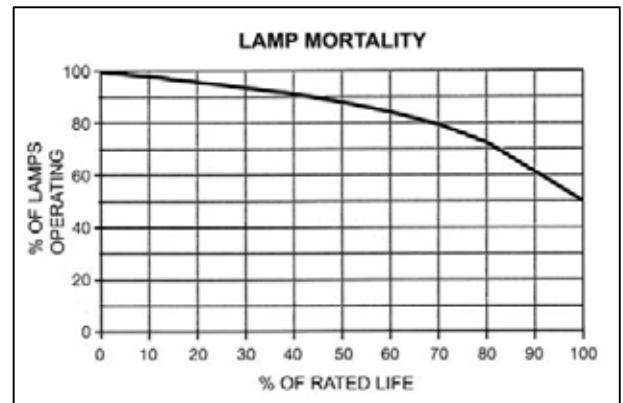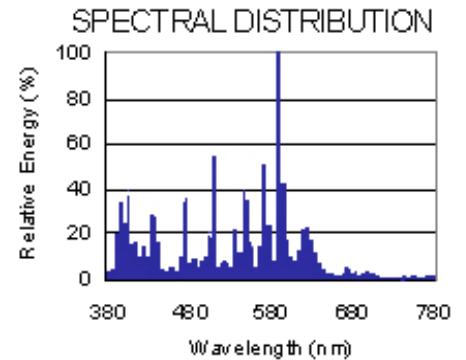



TECHNICAL INFORMATION BULLETIN

Metal Halide

⚠ WARNING

This lamp can cause serious skin burn and eye inflammation from short-wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.

RISK OF ELECTRIC SHOCK

- Turn power off before inspection, installation or removal
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock

RISK OF FIRE

- Keep combustible materials away from lamp during operation

UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE, OR PROPERTY DAMAGE

- Do not exceed rated ballast voltage
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life
- Do not turn on lamp until fully installed
- Use only with a fixture and ballast rated for this product
- Turn lamp off at least once a week for 15 minutes
- Electrically insulate any metal to glass support in fixture

⚠ CAUTION

RISK OF BURN

- Allow lamp to cool before handling.

LAMP MAY SHATTER AND CAUSE INJURY

- Do not use excessive force when installing lamp
- Dispose of lamp in a closed container

LAMP OPERATING INSTRUCTIONS

This is a discharge lamp and requires some time to restart and come up to full brightness after a power interruption. If power supply dips or is interrupted, lamps may extinguish and not restart. **Turn off power supply for 10-15 minutes and allow lamp to fully cool. Lamp will restart when power is restored.**

R

Conforms to: USA: 21CFR1040.30

Hg-LAMP CONTAINS MERCURY

Manage in Accord with Disposal Laws

See: www.lamprecycle.org or 1-888-665-2677