

TECHNICAL INFORMATION BULLETIN

MAGNETIC CFL BALLAST

RAPID START

ORDERING INFORMATION


Order code: 56605
 Description: 1L F15T8 F20T12 120 V2
 Internal code: SS2RCV2
 UPC: 69549566057

GENERAL INFORMATION

Ballast type: Magnetic
 Starting method: Rapid Start
 Lamp connection: --
 Input voltage: 120Vac +5% -10%
 Frequency: 60HZ
 Class: P
 Type: 1 outdoor
 Sound rated: A


Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input watts (W)	Input current (A)	Ballast factor	B.E.F.	Power factor	THD %	Lamp crest factor
F15T8	1	15	50/10	16.0	0.32	0.93	5.81	0.42	30	1.74
F20T8	1	20	50/10	20.0	0.34	0.83	4.15	0.50	25	1.70
FC8T9 (22W)	1	22	50/10	19.1	0.32	0.82	4.29	0.50	30	1.82
FC12T9 (30W)	1	30	50/10	25.4	0.35	0.73	2.90	0.60	40	1.95
FC16T9 (40W)	1	40	50/10	31.3	0.34	0.70	2.24	0.76	45	2.06
F15T12	1	15	50/10	16.0	0.30	0.90	5.63	0.45	20	1.73
F20T12	1	20	50/10	18.7	0.31	0.83	4.44	0.51	25	1.77
F30T12	1	30	50/10	25.0	0.32	0.83	3.32	0.66	20	1.87
F40T12 (25W)	1	25	50/10	28.0	0.33	0.66	2.36	0.71	40	1.91
F40T12 (34W)	1	34	50/10	25.0	0.38	0.69	2.76	0.54	40	1.70
F40T12 (40W)	1	40	50/10	29.7	0.31	0.66	2.22	0.79	40	1.90

WIRING DIAGRAM

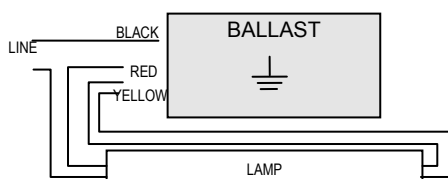

BALLAST FEATURES

Unit	M	W	L	H
INCHES	2.75	1.89	3.10	1.43
mm	69.85	40.07	78.74	36.33

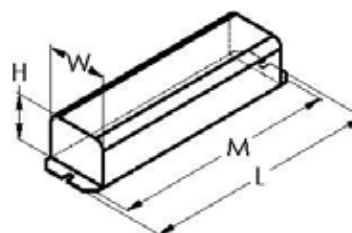

LEAD LENGTHS

	Black	Yellow	Red
INCHES	12	12	12
mm	304.8	304.8	304.8

WARRANTY:

Ballast warranty of 2 years for electromagnetic ballasts. Ballast warranty of 3 years for energy saving electromagnetic ballasts. For more information visit our website.



Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



www.standardpro.com