

ORDERING INFORMATION

Order code: 10627
 Description: F8T4/41K/330mm/G5/STD
 UPC: 69549106277
 Case quantity: 200




Nominal length : 13 in. (330 mm) Dia. : ½ in. (12 mm)


PERFORMANCE DATA

Shape:	T4
Base:	G5 (Min Bipin)
Starting method:	Rapid Start (RS)
Wattage (W):	8
Colour temperature (K):	4 100
CRI:	80
Rated life on IS ¹ ballast:	
Based on a 3 hour start	7 000
Based on a 12 hour start	8 000
Initial lumens (lm):	380
Mean lumens (lm):	357
Nominal efficiency (lm/W):	48
TCLP compliant:	N/A
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	-10

DIMENSIONS

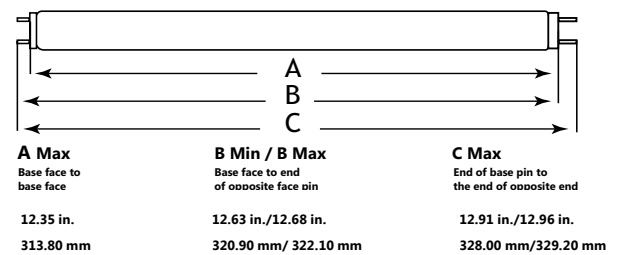

SPECTRAL DISTRIBUTION

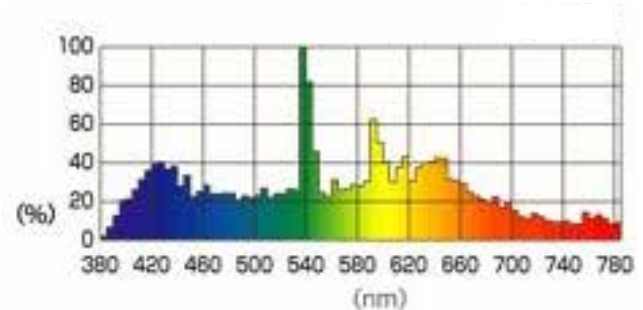

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T4 ballast.

