

## ORDERING INFORMATION

Order code: 10628  
 Description: F10T4/41K/309mm/G5/STD  
 UPC: 69549106284  
 Case quantity: 48




Nominal length : 12 in. (305 mm)    Dia. : ½ in. (12 mm)

## PERFORMANCE DATA


Shape: T4  
 Base: G5 (Min Bipin)  
 Starting method: Rapid Start (RS)  
 Wattage (W): 10  
 Colour temperature (K): 4 100  
 CRI: 80  
 Rated life on IS<sup>1</sup> ballast:  
     Based on a 3 hour start: 7 000  
     Based on a 12 hour start: 8 000  
 Initial lumens (lm): 500  
 Mean lumens (lm): 470  
 Nominal efficiency (lm/W): 50  
 TCLP compliant: N/A  
 Phosphor composition: Triphosphor  
 Nominal lamp operating frequency (Hz): 60  
<sup>2</sup> Minimum starting temperature (°C): -10

## DIMENSIONS

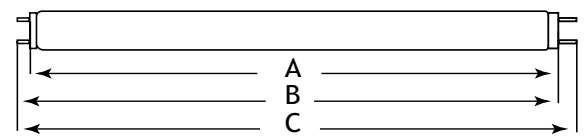

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
11.58 in.	11.86 in./11.91 in.	12.14 in./12.19 in.
294.30 mm	301.40 mm/302.60 mm	308.50 mm/309.70 mm

## SPECTRAL DISTRIBUTION

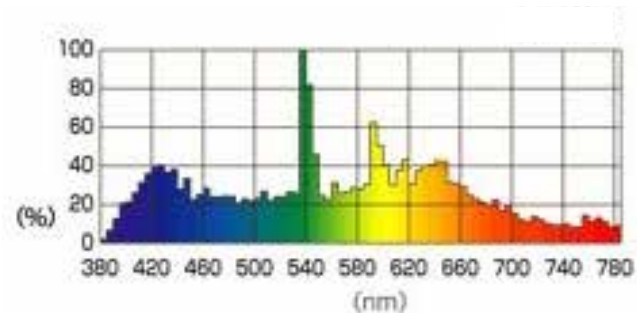

<sup>1</sup> The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

<sup>2</sup> The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T4 ballast.

