

ORDERING INFORMATION

Order code: 10617
 Description: F16T4/35K/475mm/G5/STD
 UPC: 69549106178
 Case quantity: 200




Nominal length : 19 in. (475 mm) Dia. : ½ in. (12 mm)

PERFORMANCE DATA


| | |
|---|------------------|
| Shape: | T4 |
| Base: | G5 (Min Bipin) |
| Starting method: | Rapid Start (RS) |
| Wattage (W): | 16 |
| Colour temperature (K): | 3 500 |
| CRI: | 80 |
| Rated life on IS ¹ ballast: | |
| Based on a 3 hour start | 7 000 |
| Based on a 12 hour start | 8 000 |
| Initial lumens (lm): | 1 000 |
| Mean lumens (lm): | 940 |
| Nominal efficiency (lm/W): | 63 |
| TCLP compliant: | N/A |
| Phosphor composition: | Triphosphor |
| Nominal lamp operating frequency (Hz): | 60 |
| ² Minimum starting temperature (°C): | -10 |

DIMENSIONS

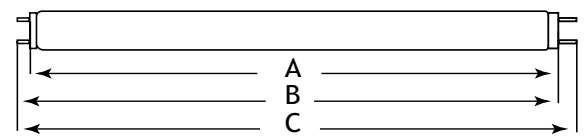

| A Max | B Min / B Max | C Max |
|------------------------|---------------------------------------|--|
| Base face to base face | Base face to end of opposite face pin | End of base pin to the end of opposite end |
| 18.12 in. | 18.40 in./18.44 in. | 18.68 in./18.72 in. |
| 460.30 mm | 467.40 mm/468.60 mm | 474.50 mm/475.70 mm |

SPECTRAL DISTRIBUTION

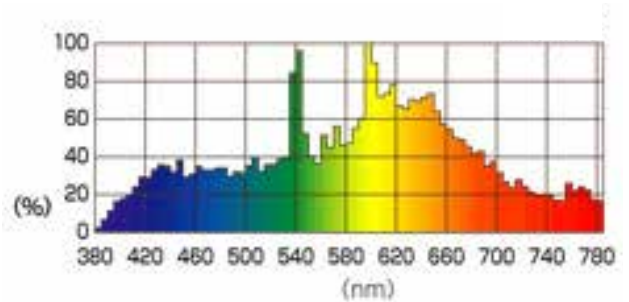

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T4 ballast.

