

ORDERING INFORMATION

Order code: 10630
 Description: F16T4/41K/475mm/G5/STD
 UPC: 69549106307
 Case quantity: 48




Nominal length : 19 in. (475 mm) Dia. : ½ in. (12 mm)

PERFORMANCE DATA


Shape:	T4
Base:	G5 (Min Bipin)
Starting method:	Rapid Start (RS)
Wattage (W):	16
Colour temperature (K):	4 100
CRI:	80
Rated life on IS ¹ ballast:	
Based on a 3 hour start	7 000
Based on a 12 hour start	8 000
Initial lumens (lm):	1 000
Mean lumens (lm):	940
Nominal efficiency (lm/W):	63
TCLP compliant:	N/A
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	-10

DIMENSIONS

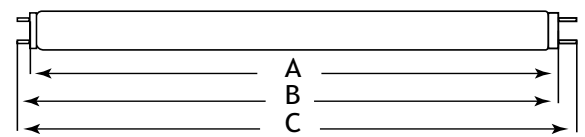

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
18.12 in.	18.40 in./18.44 in.	18.68 in./18.72 in.
460.30 mm	467.40 mm/468.60 mm	474.50 mm/475.70 mm

SPECTRAL DISTRIBUTION

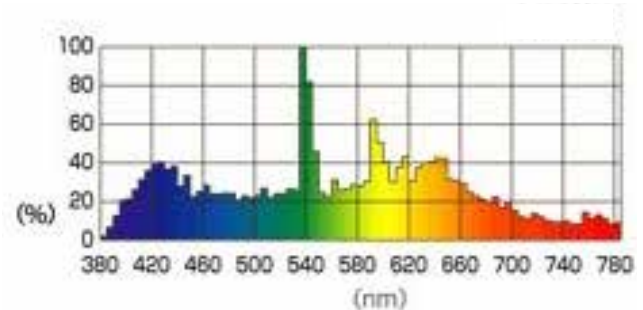

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T4 ballast.

