

## ORDERING INFORMATION

Order code: 10604  
 Description: F21T5/35K/8/PS/G5/STD  
 UPC: 69549106048  
 Case quantity: 25




Nominal length : 34 in. (864 mm) Dia. : 5/8 in. (16 mm)

## PERFORMANCE DATA


Shape: T5  
 Base: G5 (Min Bipin)  
 Starting method: Program Start (PS)  
 Wattage (W): 21  
 Colour temperature (K): 3 500  
 CRI: 85  
 Rated life on PS/PRS<sup>1</sup> ballast:  
     Based on a 3 hour start 24 000  
     Based on a 12 hour start 30 000  
 Initial lumens (lm): 2 100  
 Mean lumens (lm): 1 995  
 Nominal efficiency (lm/W): 100  
 TCLP compliant: Yes  
 Phosphor composition: Triphosphor  
 Nominal lamp operating frequency (Hz): 60  
<sup>2</sup> Minimum starting temperature (°C): -10

## DIMENSIONS

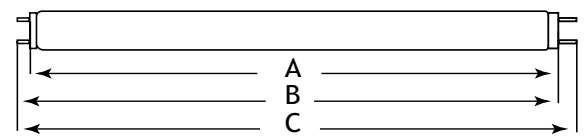

A Max Base face to base face	B Min / B Max Base face to end of opposite face pin	C Max End of base pin to the end of opposite end
33.42 in. 849.0 mm	33.61 in./33.70 in. 853.7 mm/856.1 mm	33.98 in. 863.2 mm

## SPECTRAL DISTRIBUTION

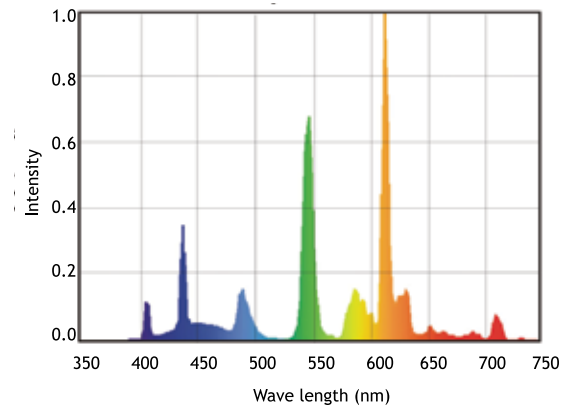

<sup>1</sup> The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

<sup>2</sup> The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 ballast.

