

## ORDERING INFORMATION

Order code: 10607  
 Description: F28T5/35K/8/PS/G5/STD  
 UPC: 69549106079  
 Case quantity: 25




Nominal length : 46 in. (1 168 mm) Dia. : 5/8 in. (16 mm)

## PERFORMANCE DATA


Shape: T5  
 Base: G5 (Min Bipin)  
 Starting method: Program Start (PS)  
 Wattage (W): 28  
 Colour temperature (K): 3 500  
 CRI: 85  
 Rated life on PS/PRS<sup>1</sup> ballast:  
     Based on a 3 hour start 24 000  
     Based on a 12 hour start 30 000  
 Initial lumens (lm): 2 900  
 Mean lumens (lm): 2 755  
 Nominal efficiency (lm/W): 104  
 TCLP compliant: Yes  
 Phosphor composition: Triphosphor  
 Nominal lamp operating frequency (Hz): 60  
<sup>2</sup> Minimum starting temperature (°C): -10

## DIMENSIONS

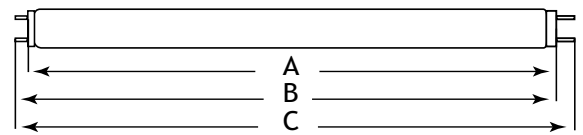

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
45.23 in.	45.42 in./45.51 in.	45.79 in.
1 149.0 mm	1 153.7 mm/1 156.1 mm	1 163.2 mm

## SPECTRAL DISTRIBUTION

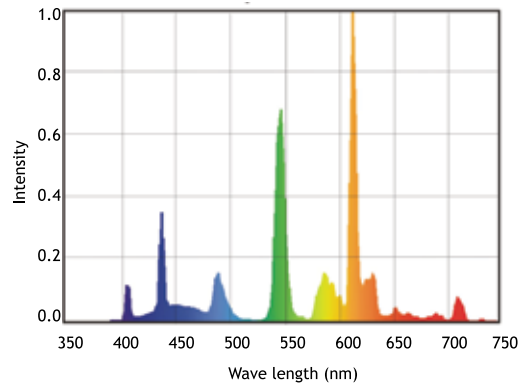

<sup>1</sup> The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

<sup>2</sup> The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 ballast.



**E** Means this bulb meets federal minimum efficiency standards.