

ORDERING INFORMATION

Order code: 10634
 Description: F14T8/DL/PH/G13/STD
 UPC: 69549106345
 Case quantity: 48




Nominal length : 15 in. (381 mm) Dia. : 1 in. (26 mm)

PERFORMANCE DATA


Shape:	T8
Base:	G13 (Med Bipin)
Starting method:	Preheat Start (PH)
Wattage (W):	14
Colour temperature (K):	6 500
CRI:	62
Rated life on IS ¹ ballast:	
Based on a 3 hour start	6 000
Based on a 12 hour start	7 500
Initial lumens (lm):	575
Mean lumens (lm):	541
Nominal efficiency (lm/W):	41
TCLP compliant:	N/A
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	-10

DIMENSIONS

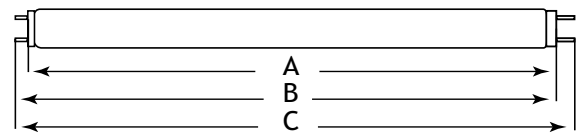

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
16.37 in.	16.59 in./16.65 in.	16.87 in./16.92 in.
416.00 mm	421.80 mm/423.00 mm	428.80 mm/430.00 mm

DIMENSIONS

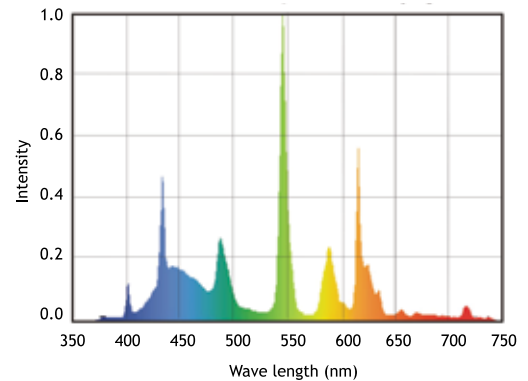

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 ballast.

