

ORDERING INFORMATION

Order code: 62023
 Description: F15T8/DL/PH/G13/STD
 UPC: 69549620230
 Case quantity: 25




Nominal length : 18 in. (457 mm) Dia. : 1 in. (26 mm)

PERFORMANCE DATA


Shape: T8
 Base: G13 (Med Bipin)
 Starting method: Preheat Start (PH)
 Wattage (W): 15
 Colour temperature (K): 6 500
 CRI: 75
 Rated life on PS/PRS¹ ballast:
 Based on a 3 hour start 24 000
 Based on a 12 hour start 30 000
 Initial lumens (lm): 800
 Mean lumens (lm): 700
 Nominal efficiency (lm/W): 53
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10

DIMENSIONS

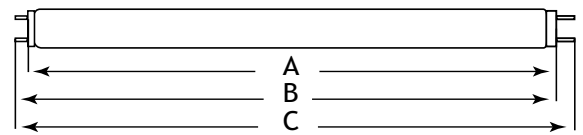

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
16.37 in.	16.59 in./16.65 in.	16.87 in./16.92 in.
416.00 mm	421.80 mm/423.00 mm	428.80 mm/430.00 mm

DIMENSIONS

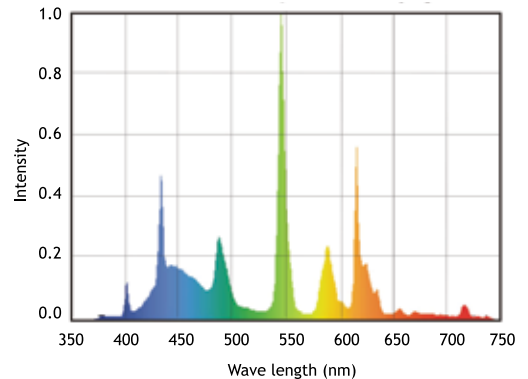

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.
² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 ballast.

