

ORDERING INFORMATION

Order code: 10507
 Description: F16T8/CW/APL/26/PH/G13/STD
 UPC: 69549105072
 Case quantity: 48




Nominal length : 26 in. (660 mm) Dia. : 1 in. (26 mm)

PERFORMANCE DATA


Shape: T8
 Base: G13 (Med Bipin)
 Starting method: Rapid Start (RS)
 Wattage (W): 16
 Colour temperature (K): 4 100
 CRI: 62
 Rated life on IS¹ ballast:
 Based on a 3 hour start: 6 000
 Based on a 12 hour start: 7 500
 Initial lumens (lm): 1 275
 Mean lumens (lm): 1 199
 Nominal efficiency (lm/W): 80
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10

DIMENSIONS

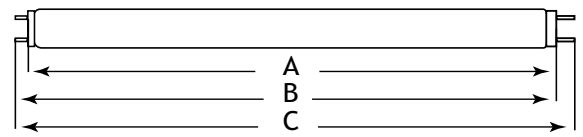

A Max Base face to base face	B Min / B Max Base face to end of opposite face pin	C Max End of base pin to the end of opposite end
25.22 in. 640.6 mm	25.40 in./ 25.49 in. 645.2 mm/ 647.7 mm	25.77 in. 654.8 mm

SPECTRAL DISTRIBUTION

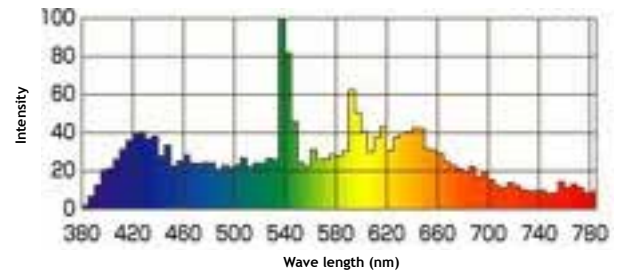

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 Appliance ballast.

