

ORDERING INFORMATION

Order code: 10509
 Description: F18T8/CW/APL/30/PH/G13/STD
 UPC: 69549105096
 Case quantity: 100




Nominal length : 30 in. (762 mm) Dia. : 1 in. (26 mm)

PERFORMANCE DATA


Shape: T8
 Base: G13 (Med Bipin)
 Starting method: Rapid Start (RS)
 Wattage (W): 18
 Colour temperature (K): 4 100
 CRI: 62
 Rated life on IS¹ ballast:
 Based on a 3 hour start 6 000
 Based on a 12 hour start 7 500
 Initial lumens (lm): 1 400
 Mean lumens (lm): 1 316
 Nominal efficiency (lm/W): 78
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10

DIMENSIONS

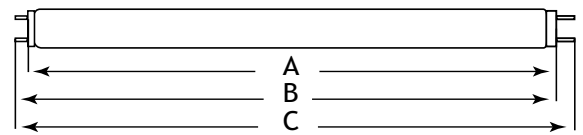

A Max Base face to base face	B Min / B Max Base face to end of opposite face pin	C Max End of base pin to the end of opposite end
29.22 in. 742.2 mm	29.40 in./ 29.49 in. 746.8 mm/ 749.3 mm	29.77 in. 756.4 mm

SPECTRAL DISTRIBUTION

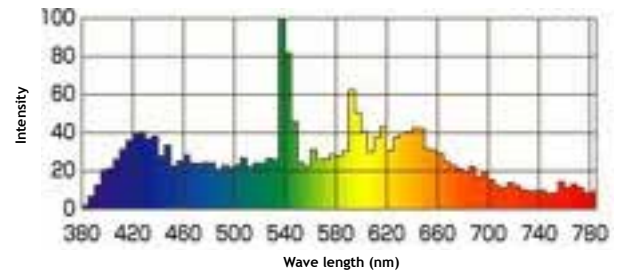

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 Appliance ballast.

