

Technical Information Bulletin Fluorescent

E-Lume™

ORDERING INFORMATION

Order code: 56509
 Description: F4T5/CW/PH/G5/ELUME
 UPC: 69549565098
 Case quantity: 48




Nominal length : 6 in. (152 mm) Dia. : 5/8 in. (16 mm)


PERFORMANCE DATA

Shape:	T5
Base:	G5 (Min Bipin)
Starting method:	Preheat Start (PH)
Wattage (W):	4
Colour temperature (K):	4 100
CRI:	62
Rated life on IS ¹ ballast:	
Based on a 3 hour start	5 000
Based on a 12 hour start	6 000
Initial lumens (lm):	120
Mean lumens (lm):	113
Nominal efficiency (lm/W):	30
TCLP compliant:	N/A
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	10

DIMENSIONS

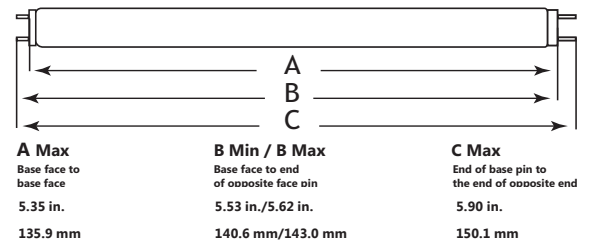

SPECTRAL DISTRIBUTION

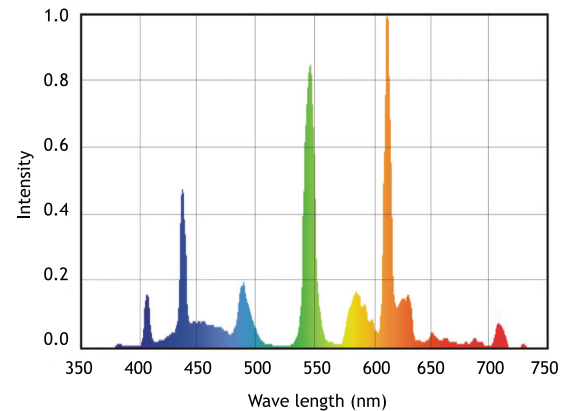

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 E-Lume ballast.

