

Technical Information Bulletin Fluorescent

E-Lume™

ORDERING INFORMATION

Order code: 56510
 Description: F6T5/CW/PH/G5/ELUME
 UPC: 69549565104
 Case quantity: 48




Nominal length : 9 in. (229 mm) Dia. : 5/8 in. (16 mm)

PERFORMANCE DATA


Shape:	T5
Base:	G5 (Min Bipin)
Starting method:	Preheat Start (PH)
Wattage (W):	6
Colour temperature (K):	4 100
CRI:	62
Rated life on IS ¹ ballast:	
Based on a 3 hour start	6 000
Based on a 12 hour start	7 500
Initial lumens (lm):	240
Mean lumens (lm):	226
Nominal efficiency (lm/W):	40
TCLP compliant:	N/A
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	10

DIMENSIONS

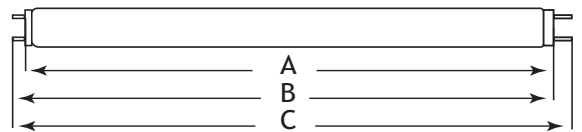

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
8.35 in.	8.53 in./8.62 in	8.90 in.
212.1 mm	216.8 mm/219.2 mm	226.3 mm

SPECTRAL DISTRIBUTION

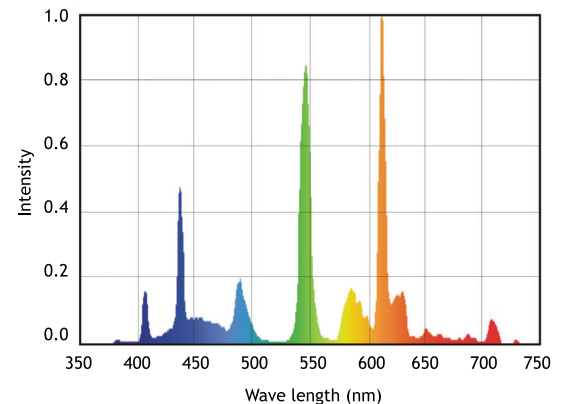

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 E-Lume ballast.

