

Technical Information Bulletin Fluorescent

E-Lume™

ORDERING INFORMATION

Order code: 56518
 Description: F13T5/WW/PH/G5/ELUME
 UPC: 69549565180
 Case quantity: 48




Nominal length : 21 in. (530 mm) Dia. : 5/8 in. (16 mm)

PERFORMANCE DATA


Shape:	T5
Base:	G5 (Min Bipin)
Starting method:	Preheat Start (PH)
Wattage (W):	13
Colour temperature (K):	3 000
CRI:	62
Rated life on IS ¹ ballast:	
Based on a 3 hour start	6 000
Based on a 12 hour start	7 500
Initial lumens (lm):	800
Mean lumens (lm):	752
Nominal efficiency (lm/W):	62
TCLP compliant:	N/A
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	10

DIMENSIONS

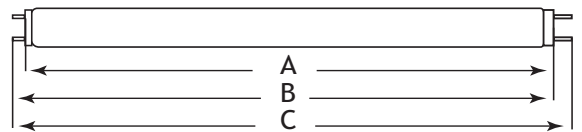

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
21.61 in.	21.79 in./21.89 in.	22.17 in.
549.0 mm	553.7 mm/556.1 mm	563.2 mm

SPECTRAL DISTRIBUTION

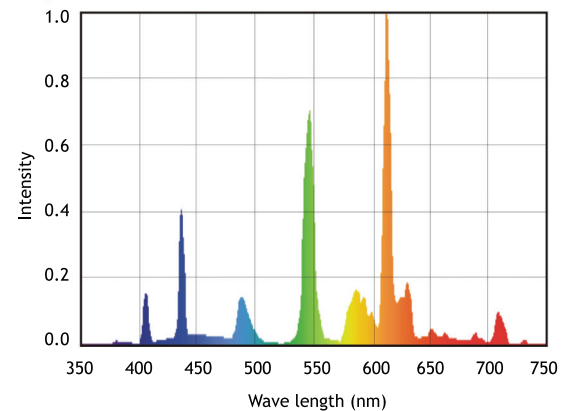

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 E-Lume ballast.

