

Technical Information Bulletin Fluorescent

E-Lume™

ORDERING INFORMATION

Order code: 57392
 Description: F13T5/CW/PH/G5 / E-LUME
 UPC: 69549573925
 Case quantity: 48




Nominal length : 21 in. (530 mm) Dia. : 5/8 in. (16 mm)

PERFORMANCE DATA


Shape: T5
 Base: G5 (Min Bipin)
 Starting method: Preheat Start (PH)
 Wattage (W): 13
 Colour temperature (K): 4 100
 CRI: 62
 Rated life on IS¹ ballast:
 Based on a 3 hour start 6 000
 Based on a 12 hour start 7 500
 Initial lumens (lm): 740
 Mean lumens (lm): 695
 Nominal efficiency (lm/W): 57
 TCLP compliant: N/A
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): 10

DIMENSIONS

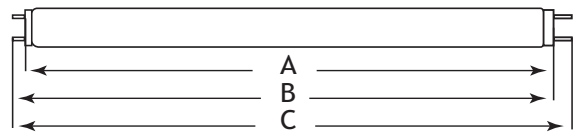

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
21.61 in.	21.79 in./21.89 in.	22.17 in.
549.0 mm	553.7 mm/556.1 mm	563.2 mm

SPECTRAL DISTRIBUTION

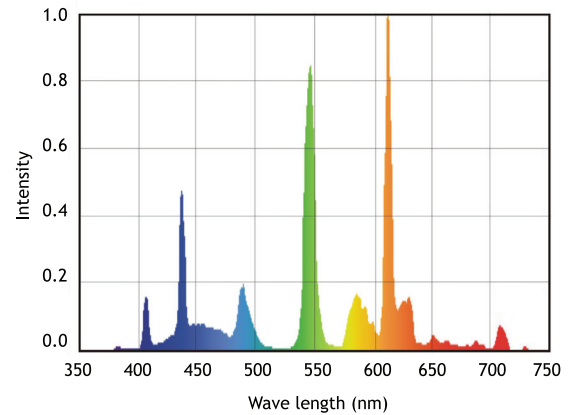

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 E-Lume ballast.

