

Technical Information Bulletin Fluorescent

E-Lume™

ORDERING INFORMATION

Order code: 56515
 Description: F15T8/DL/PH/G13/ELUME
 UPC: 69549565159
 Case quantity: 48




Nominal length : 18 in. (457mm) Dia. : 1 in. (26 mm)

PERFORMANCE DATA


Shape: T8
 Base: G13 (Med Bipin)
 Starting method: Preheat Start (PH)
 Wattage (W): 15
 Colour temperature (K): 6 500
 CRI: 62
 Rated life on IS¹ ballast:
 Based on a 3 hour start 6 000
 Based on a 12 hour start 7 500
 Initial lumens (lm): 560
 Mean lumens (lm): 526
 Nominal efficiency (lm/W): 37
 TCLP compliant: N/A
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): 10

DIMENSIONS

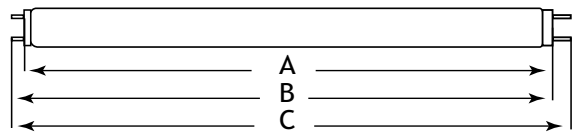

A Max	B Min / B Max	C Max
Base face to base face	Base face to end of opposite face pin	End of base pin to the end of opposite end
18.12 in.	18.40 in./18.44 in.	18.68 in./18.72 in.
460.30 mm	467.40 mm/468.60 mm	474.50 mm/475.70 mm

SPECTRAL DISTRIBUTION

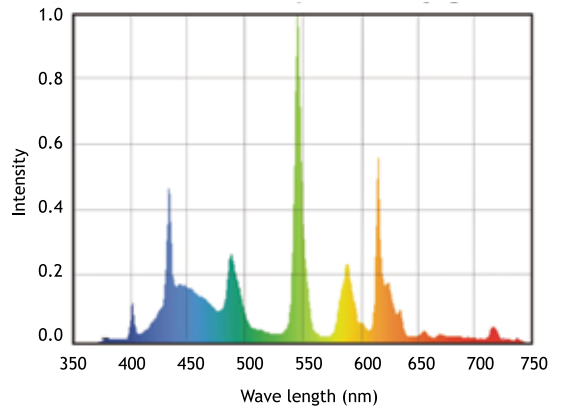

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 E-Lume ballast.

