

Technical Information Bulletin Fluorescent

E-Lume™

ORDERING INFORMATION

Order code: 59200
 Description: F39T5/41K/8/HO/PS/G5/ELUME
 UPC: 69549592001
 Case quantity: 25




Nominal length : 34 in. (864 mm) Dia. : 5/8 in. (16 mm)


PERFORMANCE DATA

Shape:	T5
Base:	G5 (Min Bipin)
Starting method:	Program Start (PS)
Wattage (W):	39
Colour temperature (K):	4 100
CRI:	85
Rated life on PS/PRS ¹ ballast:	
Based on a 3 hour start	24 000
Based on a 12 hour start	30 000
Initial lumens (lm):	3 500
Mean lumens (lm):	3 325
Nominal efficiency (lm/W):	90
TCLP compliant:	Yes
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	-10

DIMENSIONS

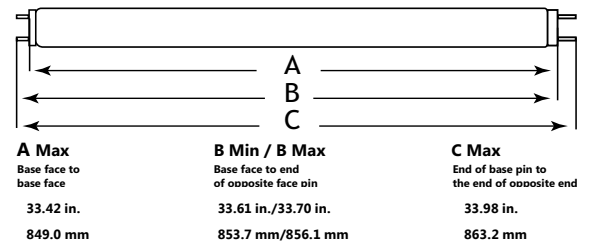

SPECTRAL DISTRIBUTION

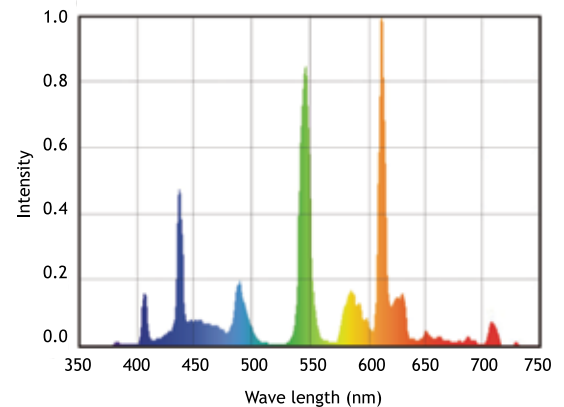

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 E-Lume ballast.

