


ORDERING INFORMATION

Order code: 10468
 Description: E32642-347-BLS BOTTOM LEADS W/ STUDS
 UPC: 69549104686


SPECIFICATIONS

Ballast Type Electronic
 Starting Method Rapid Start
 Lamp Connection Series
 Input Voltage 347V
 Input Frequency 60HZ
 Status Passive

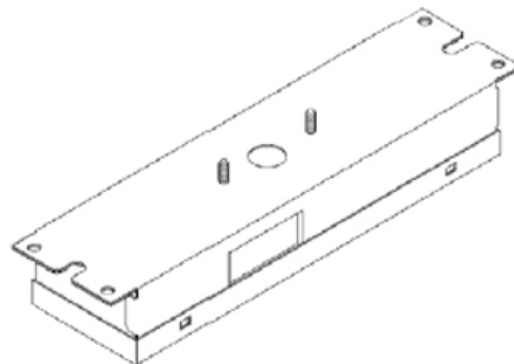

Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
PLT 42W	3	42	14/-10	0.36	121	0.79	10	0.99	1.7	0.65
PLT 32W	3	32	14/-10	0.26	90	0.74	15	0.98	1.7	0.82
PLT 26W	3	26	14/-10	0.23	80	0.87	15	0.98	1.7	1.09
PLL 40W	3	40	14/-10	0.33	114	0.92	10	0.99	1.7	0.81
PLL 39W	3	39	14/-10	0.28	99	0.56	15	0.98	1.7	0.57
PLL 36W	3	36	14/-10	0.28	96	0.77	15	0.98	1.7	0.8

WIRING DIAGRAM

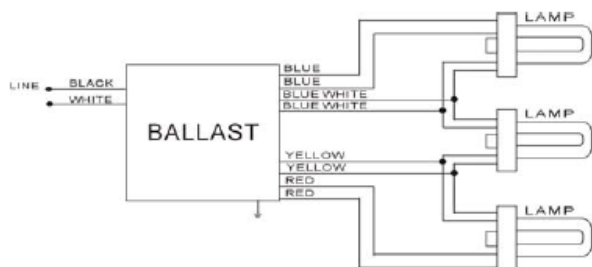


LEADS LENGTH

Black	5.9" (15 cm)
White	5.9" (15 cm)
Blue	5.9" (15 cm)
Red	5.9" (15 cm)
Yellow	5.9" (15 cm)
Blue/White	5.9" (15 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.10 cm)
Width (W):	2.4" (6.1 cm)
Height (H):	1.45" (3.7 cm)
Mounting (M):	8.90" (22.6 cm)

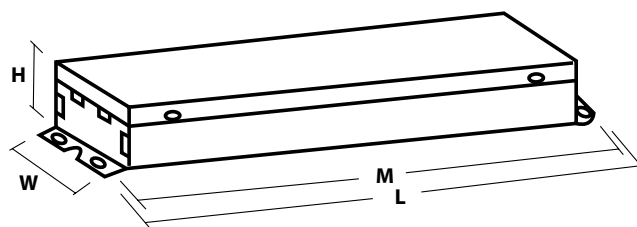

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.

For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

September 7, 2018