


ORDERING INFORMATION

Order code: 16695
Description: BMH1000/600V/C/CWI/H
UPC: 69549166950



SPECIFICATIONS

Ballast type: Magnetic metal halide
Ballast style: Core and coil
Circuit type: CWI
ANSI code: M47
Input voltage (V): 600
Input frequency (Hz): 60
Line volt regulation: $\pm 10\%$
Line watt regulation: $\pm 5\%$
Insulation class: H (180°)



4" x 6" Core



Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
600	2.00	1.90	0.55	1 000	1 100	415	-	B	5	0.40 - 0.75	0.90	-20°F / -30°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	375 - 455
Short circuit:	4.80 - 6.20

BALLAST DIMENSIONS


Dimension A:	4.50"
Dimension B:	6.00"
Lead Lengths:	12.00"
Weight (lbs):	31.00

WIRING DIAGRAM

Ground ballast core

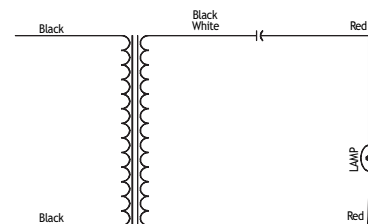

CAPACITOR



Rating: 24 Mfd
480 VAC min.
Dry film capacitor
Thermal plastic
Max. case temp.: 100 °C
No PCB'S