

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____



ORDERING INFORMATION

Order code: 63303
 Description: LED/CL14/25W/40K/FM/RND/STD
 UPC: 69549633032
 Case quantity: 1
 Luminaire description: Round LED Ceiling Luminaire

FEATURES AND SPECIFICATIONS

Lens type: Frosted Acrylic Diffuser
Lens benefits: Easy to install diffuser with twist and lock.
Housing: Simple, functional and low profile design.
Applications: Ideal for use in closets, utility areas, hallways, bedrooms, offices & various residential and commercial applications.
Benefits compared to Traditional Light: Uses less energy than fluorescent lights, lasts longer and is maintenance free.



For a complete list of ENERGY STAR qualified products, please visit www.standardpro.com

FIXTURE PERFORMANCE

Wattage (W): 25
 Colour temperature (K): 4 000
 CRI: 80
 Average life in hours: 50 000
 Lumens: 1 650
 Efficacy with lens (LPW): 66
 Voltage (V): 120
 Hertz (Hz): 60
 mili Amps (mA): 660
 Beam angle: 90°
 Mounting: Surface Mount/Flush-mount

POWER FACTOR (PF)

0.95

TOTAL HARMONIC DISTORTION (THD)

< 20 %

AMBIENT OPERATING TEMPERATURES

-10°C/44°F to 40°C/104°F

COMPATIBLE DIMMER LIST

COOPER: DAL06P, SAL06P and SLC03P
 LEVITON: Decora – 6674 and Illuma Tech IPL06
 LUTRON: Maestro MACL-153P, Diva DVCL-153P, Contour CTCL-153P


Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

November 10, 2016


ORDERING INFORMATION

Order code: 63303
 Description: LED/CL14/25W/40K/FM/RND/STD
 UPC: 695496323032
 Case quantity: 1
 Luminaire description: Round LED Ceiling Luminaire

PHOTOMETRICS - BEAM SPREAD*

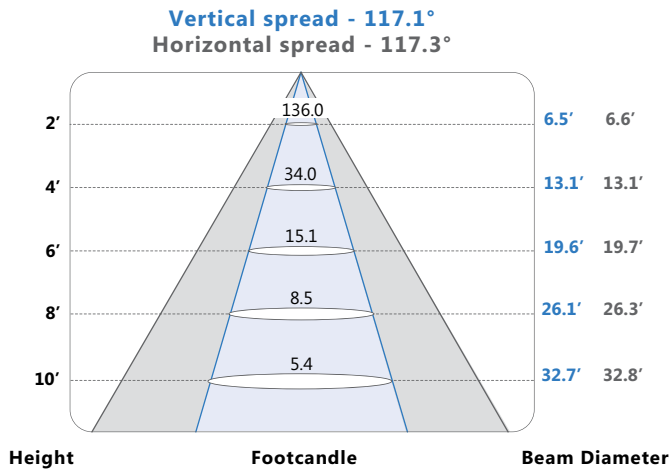

PHOTOMETRICS - CANDELA DISTRIBUTION*

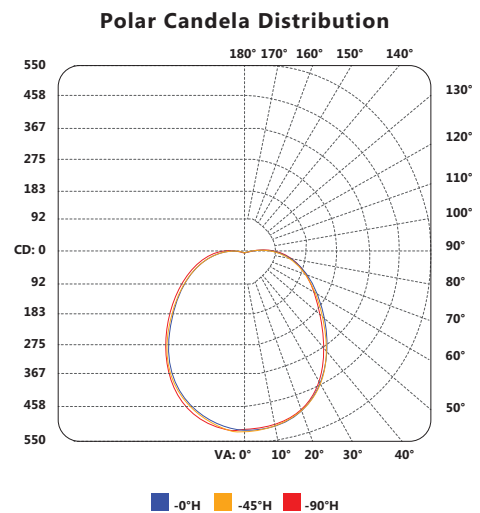

PHOTOMETRICS - COEFFICIENTS OF UTILIZATION (ZONAL CAVITY METHOD)*

| RCC %: | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 |
|--------|------|------|------|------|------|------|------|-----|------|------|------|---|-----|-----|-----|---|-----|-----|-----|---|-----|
| RW %: | 70 | 50 | 30 | 0 | 70 | 50 | 30 | 0 | 50 | 30 | 20 | 0 | 50 | 30 | 20 | 0 | 50 | 30 | 20 | 0 | 0 |
| RCR: 0 | 1.17 | 1.17 | 1.17 | 1.17 | 1.13 | 1.13 | 1.13 | .90 | 1.06 | 1.06 | 1.06 | | .99 | .99 | .99 | | .93 | .93 | .93 | | .90 |
| 1 | 1.04 | .99 | .94 | .89 | 1.01 | .96 | .91 | .72 | .89 | .86 | .82 | | .84 | .81 | .78 | | .79 | .76 | .74 | | .71 |
| 2 | .94 | .85 | .78 | .71 | .91 | .82 | .76 | .59 | .77 | .72 | .67 | | .72 | .68 | .64 | | .68 | .64 | .61 | | .58 |
| 3 | .86 | .74 | .66 | .59 | .82 | .72 | .64 | .50 | .68 | .61 | .55 | | .63 | .58 | .53 | | .60 | .55 | .51 | | .48 |
| 4 | .78 | .66 | .56 | .49 | .75 | .64 | .55 | .43 | .60 | .52 | .47 | | .56 | .50 | .45 | | .53 | .48 | .43 | | .41 |
| 5 | .72 | .58 | .49 | .42 | .69 | .57 | .48 | .37 | .53 | .46 | .40 | | .50 | .44 | .39 | | .48 | .42 | .37 | | .35 |
| 6 | .66 | .52 | .43 | .37 | .64 | .51 | .42 | .32 | .48 | .41 | .35 | | .46 | .39 | .34 | | .43 | .37 | .33 | | .30 |
| 7 | .61 | .47 | .38 | .32 | .59 | .46 | .38 | .29 | .44 | .36 | .31 | | .41 | .35 | .30 | | .39 | .33 | .29 | | .27 |
| 8 | .57 | .43 | .35 | .29 | .55 | .42 | .34 | .26 | .40 | .33 | .27 | | .38 | .31 | .27 | | .36 | .30 | .26 | | .24 |
| 9 | .53 | .40 | .31 | .26 | .51 | .39 | .31 | .23 | .37 | .30 | .25 | | .35 | .29 | .24 | | .33 | .28 | .23 | | .21 |
| 10 | .50 | .36 | .28 | .23 | .48 | .36 | .28 | .21 | .34 | .27 | .22 | | .32 | .26 | .22 | | .31 | .25 | .21 | | .19 |

CAN ICES-005 (B) / NMB-005 (B)

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

November 10, 2016


ORDERING INFORMATION

Order code: 63303
 Description: LED/CL14/25W/40K/FM/RND/STD
 UPC: 69549633032
 Case quantity: 1
 Luminaire description: Round LED Ceiling Luminaire

DIMENSIONS

Length: 14" (35.56 cm)
 Diameter: 14" (35.56 cm)
 Height: 3.5" (8.89 cm)
 Depth: 3.5" (8.89 cm)

TECHNICAL DRAWINGS

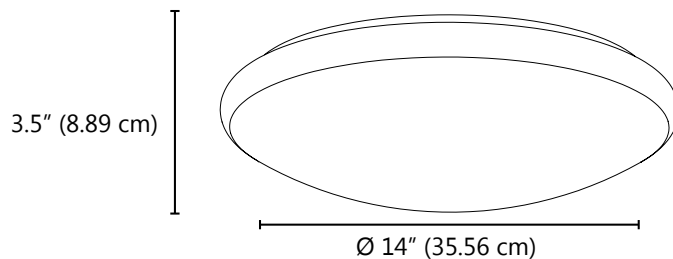

WARNINGS

- Installation and maintenance must be performed by licensed electricians only.
- To avoid risk of electric shock, make sure to turn off main power switch prior to installation or maintenance.
- Must be installed in compliance with Canadian Electrical Code in Canada or National Electrical Code (NEC) in the US.
- Make sure input voltage and frequency are compatible with the fixture. Check installation guide for power requirements prior to installation.

WARNING – Risk of electric shock. Suitable for damp locations.

| Qty | Description | Price |
|-----|-------------|-------|
| | | |

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____