

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_

### ORDERING INFORMATION


Order code: 64578  
 Description: LUCS/5.9IN/2.5W/40K/STD  
 UPC: 69549645783  
 Case quantity: 4 / 40



### FEATURES AND SPECIFICATIONS

Product type: LED Slim line bars  
 Frame Material: Aluminum  
 Lens Type: Frosted polycarbonate  
 Length - inch (mm): 5.9 (150)  
 Environment: Dry

### TECHNICAL DRAWINGS



### FIXTURE PERFORMANCE

Voltage: 24 V DC  
 Wattage: 2.5  
 Beam angle (°): 120  
 Colour Temperature (K)\*\*: 4 000  
 CRI : 82  
 Average Life (Hours): 25 000  
 Life in years 22.83  
 Lumens\*: 210  
 Efficacy (LPW): 84  
 Operating Temperatures: 0°C / 32°F to 40°C / 104°F  
 Maximum Run - Ft (m) 30.0 (7.6)  
 Maximum Run - Watts 120  
 Estimated Energy Cost per year: 0.30\$

\*Initial lumens range: +/- 10 %      \*\*Typical colour temperature range: +/- 5 %

For a flat installation, remove the knockouts on both ends of the LED bar.



CAN ICES-005 (B) - This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


July 20, 2016

### ORDERING INFORMATION


Order code: 64578  
 Description: LUCS/5.9IN/2.5W/40K/STD  
 UPC: 69549645783  
 Case quantity: 4 / 40

### LIGHT SPREAD IN FOOTCANDLES

#### ARMONIA 5.9" (150 mm)

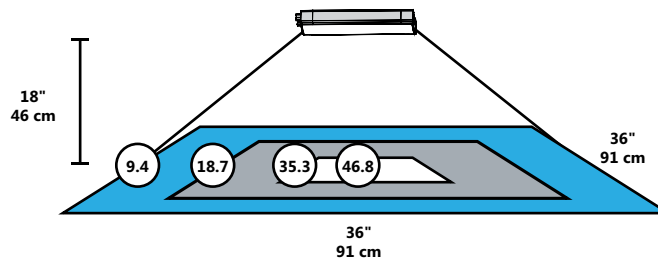

### PHOTOMETRICS - CANDELA DISTRIBUTION\*

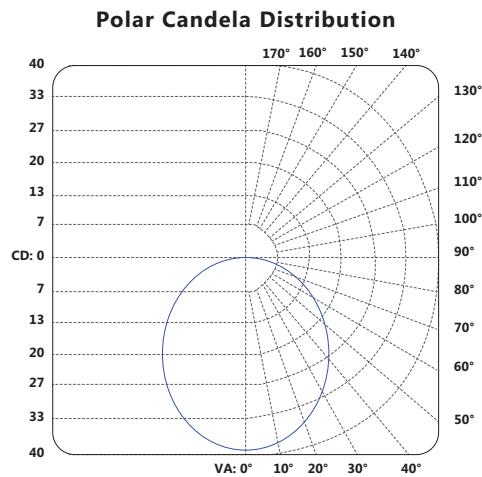

\* complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.