

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

ORDERING INFORMATION


Order code: 64583
 Description: LUCS/23.6IN/9W/30K/STD
 UPC: 69549645837
 Case quantity: 4 / 40



FEATURES AND SPECIFICATIONS

Product type: LED Slim line bars
 Frame Material: Aluminum
 Lens Type: Frosted polycarbonate
 Length - inch (mm): 23.6 (600)
 Environment: Dry

TECHNICAL DRAWINGS



FIXTURE PERFORMANCE

Voltage: 24 V DC
 Wattage: 9
 Beam angle (°): 120
 Colour Temperature (K)**: 3 000
 CRI : 82
 Average Life (Hours): 25 000
 Life in years 22.83
 Lumens*: 750
 Efficacy (LPW): 83
 Operating Temperatures: 0°C / 32°F to 40°C / 104°F
 Maximum Run - Ft (m) 30.0 (7.6)
 Maximum Run - Watts 120
 Estimated Energy Cost per year: 1.08\$

*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %

For a flat installation, remove the knockouts on both ends of the LED bar.



CAN ICES-005 (B) - This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.


Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

July 20, 2016


ORDERING INFORMATION

Order code: 64583
 Description: LUCS/23.6IN/9W/30K/STD
 UPC: 69549645837
 Case quantity: 4 / 40

LIGHT SPREAD IN FOOTCANDLES

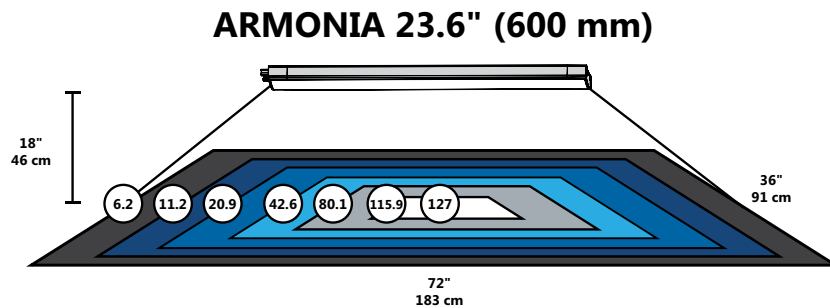

PHOTOMETRICS - CANDELA DISTRIBUTION*

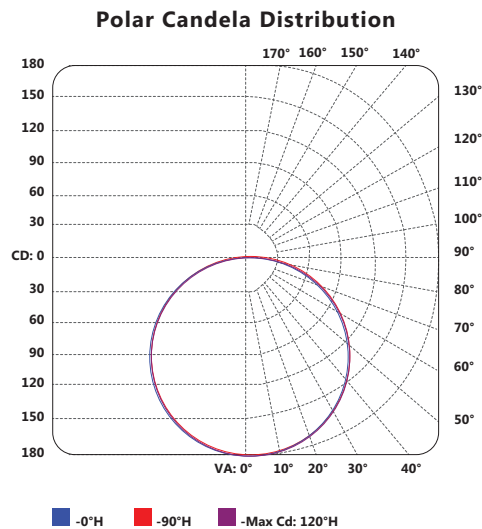

* complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.