Date:	
In hands date of project:	
Project name/Number:	
Name of distributor:	
Client #:	
Name of end user:	
Name of end user:	


ORDERING INFORMATION

Order code:	64586
Description:	LUCS/39.3IN/15W/30K/STD
UPC:	69549645868
Case quantity:	4 / 40

FEATURES AND SPECIFICATIONS

Product type:	LED Slim line bars
Frame Material:	Aluminum
Lens Type:	Frosted polycarbonate
Length - inch (mm):	39.3 (1000)
Environment:	Dry

TECHNICAL DRAWINGS



FIXTURE PERFORMANCE

Voltage:	24 V DC	
Wattage:	15	
Beam angle (°):	120	
Colour Temperature (K)**:	3 000	
CRI :	82	
Average Life (Hours):	25 000	
Life in years	22.83	
Lumens*:	1 200	
Efficacy (LPW):	80	
Operating Temperatures:	0°C / 32°F to 40°C / 104°F	
Maximum Run - Ft (m)	30.0 (7.6)	
Maximum Run - Watts	120	
Estimated Energy Cost per year:	1.81\$	
*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %		

For a flat installation, remove the knockouts on both ends of the LED bar.



CAN ICES-005 (B) - This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



ORDERING INFORMATION


 Order code:
 64586

 Description:
 LUCS/39.3IN/15W/30K/STD


 UPC:
 69549645868

 Case quantity:
 4 / 40

LIGHT SPREAD IN FOOTCANDLES

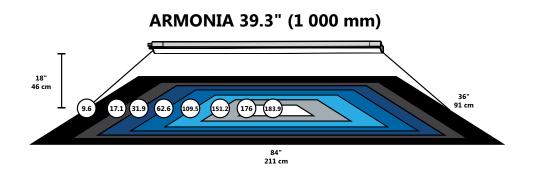

PHOTOMETRICS - CANDELA DISTRIBUTION*



* complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name:	
Company:	
Signature:	Date:

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

