

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LUMEINA

SMALL ARCHITECTURAL LED DOWNLIGHT

ORDERING INFORMATION

Order code: 64711
Model number: LUMEINA/MOD/9W/30K/60/STD
UPC: 069549647114
Case quantity: 20

PHYSICAL DATA

Size in (cm): 2 1/2" x 3 1/4" (6.2 cm x 8.1 cm)
Shape: Round
Finish: Aluminum
Lens type: Clear glass
Mounting: Recessed

PERFORMANCE DATA

Watts (W): 9
Volts (V AC): 120
Color temperature (K): 3 000
Lumen output (lm): 950
Lumen per Watts (lm/W): 106
CRI: 90
Life L70 (h): 50 000
Beam angle (°): 60
Environment: Dry location
THD (%): <20
Power factor: >0.95
Dimmable: Yes
Operating temp. range: - 20 °C to 40 °C (- 4 °F to 104 °F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

ACCESSORIES (order separately)

Order code	Model number	Type	Opening diameter (in)	Case qty (master)
66020	ACC/MPLATE/2.75IN/SQR/STD	Square mounting plate	2 3/4	96
66021	ACC/MPLATE/2.75IN/ADJ/STD	Adjustable mounting plate	2 3/4	24
66819 ¹	ACC/MPLATE/2.75IN/HANG.BARS/STD	Mounting plate with hanger bars	2 3/4	25
66046	ACC/MPLATE/3IN/SQR/STD	Square mounting plate	3	96
66142	ACC/3/VAPOR BARRIER/STD	Vapor barrier extender	3 5/8	50
66048	ACC/MPLATE/3.25IN/SQR/STD	Square mounting plate	3 1/2	96
66047	ACC/MPLATE/3.5IN/SQR/STD	Square mounting plate	3 1/4	96
66054	ACC/MPLATE/3.25IN/ADJ/STD	Adjustable mounting plate	3 1/4	24
62673 ¹	ACC/MPLATE/3.25IN/HANG.BARS/STD	Mounting plate with hanger bars	3 1/4	20
66050	ACC/MPLATE/3.75IN/SQR/STD	Square mounting plate	3 3/4	96
62771 ¹	ACC/MPLATE/3.75IN/HANG.BARS/STD	Mounting plate with hanger bars	3 3/4	20
66143	ACC/4/VAPOR BARRIER/STD	Vapor barrier extender	4 1/4	50
62672	ACC/INSULATED BOX/3_4.5/STD	Insulated box with hanger bars	3 to 4 1/2	4

¹ Includes brackets and screws.

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



5 yrs
warranty


LED
fixture


dimmable
fixture


dry
location


IC
rated


ICES
005


ETL
Intertek

COMPATIBLE TRIMS (order separately)

Order code	Model number	Type	Shape	Finish	Diameter		Cutting diameter		Case qty (master)
					in	(mm)	in	(mm)	
IC (can be used in insulated ceiling)									
64731	LUMEINA/TRIM/GMB.REC/WH/STD	Gimbal	Round	White	3 1/2	(90)	3	(77)	50
64735	LUMEINA/TRIM/SQR_RND/GMB/WH/SM/STD	Gimbal	Square	White	4 1/2	(113)	3 1/8	(80)	50
64741	LUMEINA/TRIM/GMB.CURVED/WH/STD	Gimbal	Round	White	4 3/8	(110)	3 3/4	(95)	50
64742	LUMEINA/TRIM/SQR_RND/GMB/WH/LRG/STD	Gimbal	Square	White	4 1/2	(113)	3 3/4	(95)	50
64732	LUMEINA/TRIM/SWR/WH/STD	Shower	Round	White	3 1/2	(90)	3	(77)	50
64734	LUMEINA/TRIM/D.BAF/WH/STD	Deep baffle	Round	White	4	(100)	3 1/2	(89)	50
64736	LUMEINA/TRIM/SQR_RND/REC/WH/STD	Recessed	Square	White	3 1/8	(80)	2 3/4	(70)	50
64737	LUMEINA/TRIM/CURVED/WH/STD	Curved	Round	White	3 1/8	(78)	2 3/4	(70)	50
Non-IC Accessory (not for use in insulated ceiling)									
64743	LUMEINA/TRIMEXT/STD	Trim extension	Round	White	2	(50)	—	—	50

COMPATIBLE TRIMS WITH REFLECTOR (order separately)

Order code	Model number	Type	Shape	Finish	Diameter		Cutting diameter		Case qty (master)
					in	(mm)	in	(mm)	
64738	LUMEINA/TRIM/RFL_WH/STD	Reflector	Round	White/Chrome	3 1/2	(90)	3	(77)	50
64739	LUMEINA/TRIM/RFL_SLV/STD	Reflector	Round	Silver/Chrome	3 1/2	(90)	3	(77)	50
64740	LUMEINA/TRIM/RFL_BLK/STD	Reflector	Round	Black/Chrome	3 1/2	(90)	3	(77)	50

LED DRIVERS (included with LED Modules)

Order code	System watts (W)	Max load (W)	Input volts (V AC)	Output volts (V DC)	Input current (mA)
Lumeina 9W	12	12	120	30-38	260

LUMEN SPECIFICATION TABLE

Order code	Model number	Watts (W)	3 000 K	
			Lumen output (lm)	Efficacy (lm/W)
64711	LUMEINA/MOD/9W/30K/60/STD	9	830.2	92

COMPATIBLE DIMMERS¹

Brand	Model number
Legrand	HCL453P
Cooper	9531AW, DAL06P, AAL06, SLC03P
Leviton	6615, IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ
Lutron	CTCL-153P, AYCL-253P, DVELV-300P, SELV-300P, NTELV-600P


Dimming range: 10%-100%

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.


This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS AND WEIGHT

LED DRIVER 9 W

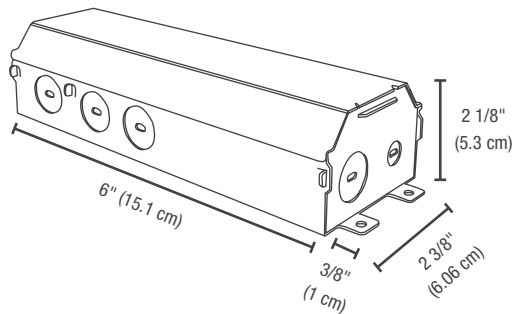

LUMEINA™ MODULE 9 W

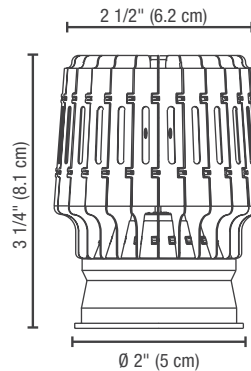


Net weight (lbs)	1.13
------------------	------

PHOTOMETRIC DATA¹

64711 • LUMEINA/MOD/9W/30K/60/STD • 830.2 lm

Polar candela distribution

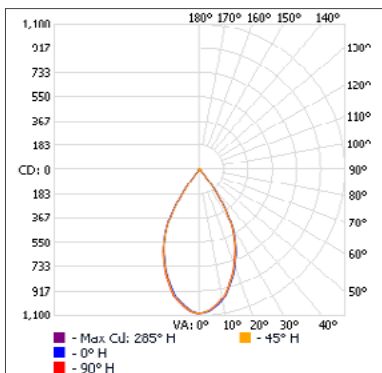

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	636.5	76.7
0-40	803.8	96.8
0-60	825.6	99.4
60-90	4.7	0.6
0-90	830.2	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	374	1.8'	1.8'
3.3'	99.3	3.6'	3.5'
5.0'	43.3	5.4'	5.4'
6.7'	24.1	7.3'	7.2'
8.3'	15.7	9.0'	8.9'
10.0'	10.8	10.8'	10.7'

■ Vert. spread : 56.9°
■ Horiz. spread : 56.4°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.