

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_



## ORDERING INFORMATION


Order code: 64255  
 Description: FB40T12/41K/9/U6/RS/G13/STD  
 UPC: 69549642553  
 Case quantity: 12

## PERFORMANCE DATA

Shape: T12  
 Base: G13 (Med Bipin)  
 Starting method: Rapid Start (RS)  
 Wattage (W): 40  
 Colour temperature (K): 4 100 (Cool White)  
 CRI: 90  
 Rated life on PS/PRS<sup>1</sup> ballast:  
     Based on a 3 hour start 24 000  
 Initial lumens (lm): 2 500  
 Mean lumens (lm): 2 500  
 Nominal efficiency (lm/W): 63  
 TCLP compliant: Yes  
 Phosphor composition: Triphosphor  
 Nominal lamp operating frequency (Hz): 60  
 Minimum starting temperature (°C): 10


Nominal length : 22 ½ in. (572 mm)      Dia. : 1 ½ in. (38 mm)

## DIMENSIONS

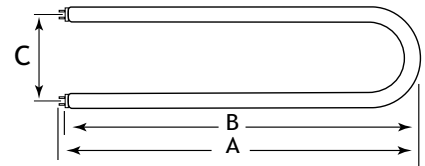

A Max	B Max	C Max
Overall length	Base face to top of lamp	Leg spacing Center to center
23 in. 584.2 mm	22.6 in. 574.04 mm	6 in. 152.4 mm

## SPECTRAL DISTRIBUTION

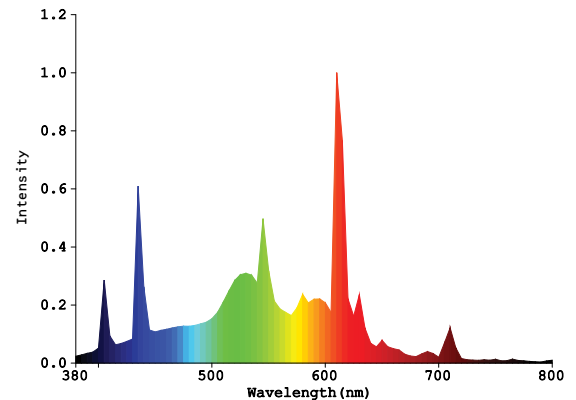

<sup>1</sup> The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.