

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____



ORDERING INFORMATION


Order code: 64256
 Description: FB40T12/65K/9/U6/RS/G13/STD
 UPC: 69549642560
 Case quantity: 12

PERFORMANCE DATA

Shape: T12
 Base: G13 (Med Bipin)
 Starting method: Rapid Start (RS)
 Wattage (W): 40
 Colour temperature (K): 6 500 (Daylight Deluxe)
 CRI: 90
 Rated life on PS/PRS¹ ballast:
 Based on a 3 hour start 24 000
 Initial lumens (lm): 2 250
 Mean lumens (lm): 2 250
 Nominal efficiency (lm/W): 56
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
 Minimum starting temperature (°C): 10


Nominal length : 22 ½ in. (572 mm) Dia. : 1 ½ in. (38 mm)

DIMENSIONS

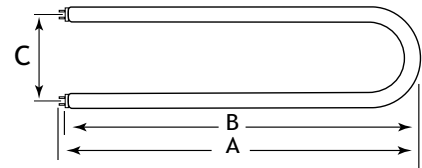

A Max	B Max	C Max
Overall length	Base face to top of lamp	Leg spacing Center to center
23 in. 584.2 mm	22.6 in. 574.04 mm	6 in. 152.4 mm

SPECTRAL DISTRIBUTION

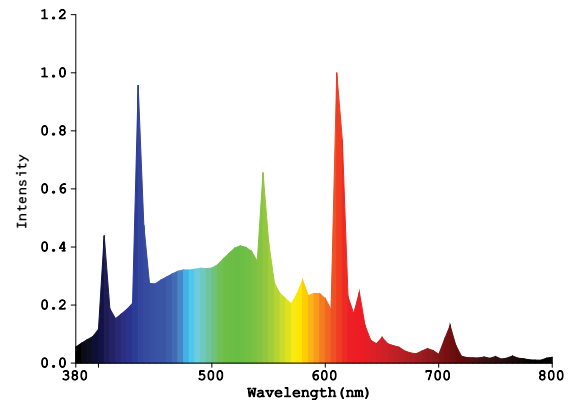

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.