



MR16 JDR Lamps


JDR cool beam reflector lamps for general lighting with a medium or intermediate base are available from 55 to 100 watts, 120 volts in a variety of beam spreads. These lamps emit a white light with colour temperatures of 3 000 K or 3 600 K.

Features

- Crisp white light
- Long life
- High CRI
- Dimming capabilities

Applications

- Residential
- Retail stores
- Museums
- Displays
- Offices
- Restaurants/Lounges

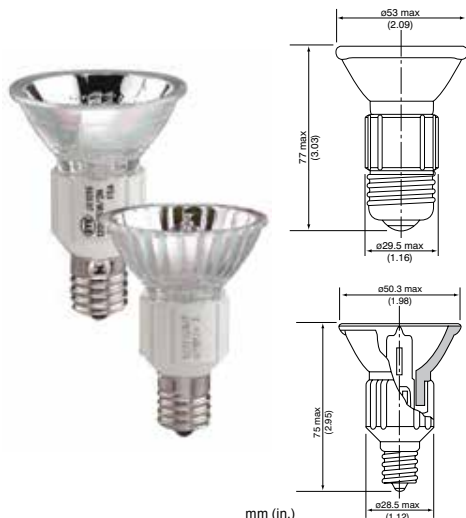

Order code	Description	ANSI code	Watts (W)	Base	Volts (V)	Colour temp. (K)	Beam angle (°)	CBCP*	Average life (hrs)	MOL** (in.) (mm)	Pack/Case Qty
30441	55MR16CG/MED/SP/120V EYE	-	55	E26	120	3 000	10	4 500	3 000	3.03 77	12/120
30442	55MR16CG/MED/NFL/120V EYE	-	55	E26	120	3 000	18	2 400	3 000	3.03 77	12/120
30443	55MR16CG/MED/NFL120V EYE	-	55	E26	120	3 000	28	1 500	3 000	3.03 77	12/120
30323	75MR16CG/E17/NFL/120V/36K EYE	-	75	E17	120	3 600	28	1 500	3 000	2.95 75	12/120
30325	75MR16CG/E17/SP/120V EYE	-	75	E17	120	3 000	10	6 300	3 000	2.95 75	12/120
30326	75MR16CG/E17/NFL/120V EYE	-	75	E17	120	3 000	28	2 100	3 000	2.95 75	12/120
30436	75MR16/E17/NFL/120V FSD EYE	FSD	75	E17	120	3 000	28	2 100	3 000	2.95 75	12/120
30432	75MR16/E17/SP/120V/3600K EYE	-	75	E17	120	3 600	10	3 800	3 000	2.95 75	12/120
15371	75MR16/E17/NFL/120V/3600K EYE	-	75	E17	120	3 600	28	1 500	3 000	2.95 75	12/120
30434	100MR16/E17/NFL/120V FSE EYE	FSE	100	E17	120	3 000	18	4 500	3 000	2.95 75	12/120
15372	100MR16/E17/SP/120V/3600K EYE	-	100	E17	120	3 600	10	5 700	3 000	2.95 75	12/120

* Center Beam Candle Power
** Conversions may vary slightly

Photometrics

55 watts - E26

Beam angle: 10°

Ø (in.)	H (ft)	(fc)
6 1/16	3' 3 3/8"	371
13 25/32	6' 6 1/4"	93
20 15/32	9' 10 1/8"	41

30441

Beam angle: 18°

Ø (in.)	H (ft)	(fc)
11 11/16	3' 3 3/8"	232
23 7/32	6' 6 1/4"	59
35 1/2	9' 10 1/8"	26

30442

Beam angle: 28°

Ø (in.)	H (ft)	(fc)
16 11/32	3' 3 3/8"	149
32 1/2	6' 6 1/4"	37
49 7/32	9' 10 1/8"	17

30443

75 watts - E17 - 3 600 K

Beam angle: 10°

Ø (in.)	H (ft)	(fc)
6 1/16	3' 3 3/8"	353
13 25/32	6' 6 1/4"	88
20 15/32	9' 10 1/8"	39

30432

Beam angle: 28°

Ø (in.)	H (ft)	(fc)
24 1/2	3' 3 3/8"	139
48 1/2	6' 6 1/4"	59
72 1/6	9' 10 1/8"	26

30323/15371

75 watts - E17 - 3 000 K

Beam angle: 10°

Ø (in.)	H (ft)	(fc)
6 1/16	3' 3 3/8"	585
13 25/32	6' 6 1/4"	146
20 15/32	9' 10 1/8"	65

30325

Beam angle: 28°

Ø (in.)	H (ft)	(fc)
16 11/32	3' 3 3/8"	195
32 1/2	6' 6 1/4"	48
49 7/32	9' 10 1/8"	21

30326/30436

100 watts - E17 - 3 000 K

Beam angle: 18°

Ø (in.)	H (ft)	(fc)
11 11/16	3' 3 3/8"	418
23 7/32	6' 6 1/4"	104
35 1/2	9' 10 1/8"	46

30434

100 watts - E17 - 3 600 K

Beam angle: 10°

Ø (in.)	H (ft)	(fc)
6 1/16	3' 3 3/8"	530
13 25/32	6' 6 1/4"	132
20 15/32	9' 10 1/8"	58

15372