





## Traditional LED Downlight

A classic and versatile LED downlight. These dimmable LED downlight kits provide exceptional light output in a sophisticated, sleek design that replicates the look of a **traditional downlight**. Easily converts most traditional recessed fixtures by mounting into a housing or installing directly into a junction box.

- All mounting hardware included for retrofit or new construction
- IC rated when used in an approved IC rated recessed housing

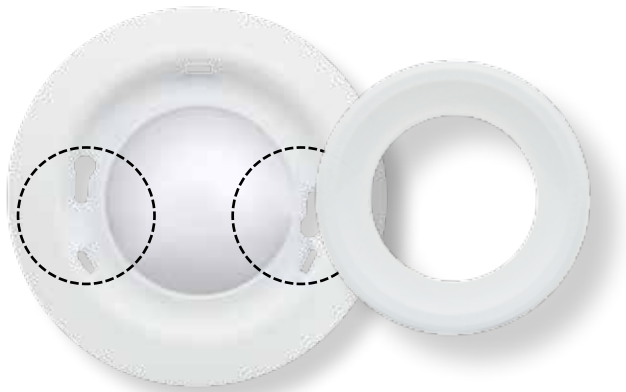

Easy installation using quick access keyhole design

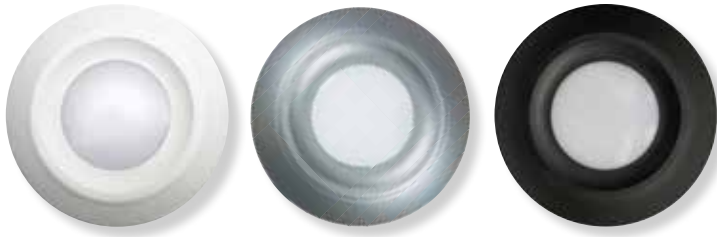

Retrofit Installation

J-Box Installation

Minimum J-Box depth required: 4" - 1 1/2", 6" - 1 1/2"

Order code	Description	Watts (W)	Colour	Volts (VAC)	Colour temp. (K)	CRI	Average life <sup>1</sup> (hrs)	Initial lumens <sup>2</sup> (lm)	Traditional equivalent (W)	Beam angle (°)	Dimmable <sup>3</sup> (Yes/No)	Case qty
------------	-------------	-----------	--------	-------------	------------------	-----	---------------------------------	----------------------------------	----------------------------	----------------	--------------------------------	----------

### 4" Downlight

MOL: 1 1/16 in. (46 mm) DIA: 5 1/32 in. (145 mm)


63641	LED/DL4/10W/27K/RETRO/WH/STD	10	White	120	2 700	82	40 000	682	50	113	Y	1/16
63642	LED/DL4/10W/27K/RETRO/BLK/STD	10	Black	120	2 700	82	40 000	682	50	113	Y	1/16
63643	LED/DL4/10W/27K/RETRO/GRY/STD	10	Grey	120	2 700	82	40 000	682	50	113	Y	1/16
63644	LED/DL4/10W/30K/RETRO/WH/STD	10	White	120	3 000	82	40 000	684	50	113	Y	1/16
63645	LED/DL4/10W/30K/RETRO/BLK/STD	10	Black	120	3 000	82	40 000	684	50	113	Y	1/16
63646	LED/DL4/10W/30K/RETRO/GRY/STD	10	Grey	120	3 000	82	40 000	684	50	113	Y	1/16
63647	LED/DL4/10W/40K/RETRO/WH/STD	10	White	120	4 000	82	40 000	723	50	113	Y	1/16
63648	LED/DL4/10W/40K/RETRO/BLK/STD	10	Black	120	4 000	82	40 000	723	50	113	Y	1/16
63649	LED/DL4/10W/40K/RETRO/GRY/STD	10	Grey	120	4 000	82	40 000	723	50	113	Y	1/16

### 6" Downlight


MOL: 1 3/32 in. (50 mm) DIA: 7 1/32 in. (180 mm)

63650	LED/DL6/12.5W/27K/RETRO/WH/STD	12.5	White	120	2 700	84	40 000	800	65	113	Y	1/16
63653	LED/DL6/12.5W/30K/RETRO/WH/STD	12.5	White	120	3 000	84	40 000	809	65	113	Y	1/16
63654	LED/DL6/12.5W/30K/RETRO/BLK/STD	12.5	Black	120	3 000	84	40 000	809	65	113	Y	1/16
63655	LED/DL6/12.5W/30K/RETRO/GRY/STD	12.5	Grey	120	3 000	84	40 000	809	65	113	Y	1/16
63656	LED/DL6/12.5W/40K/RETRO/WH/STD	12.5	White	120	4 000	84	40 000	853	65	113	Y	1/16


### 4 inch

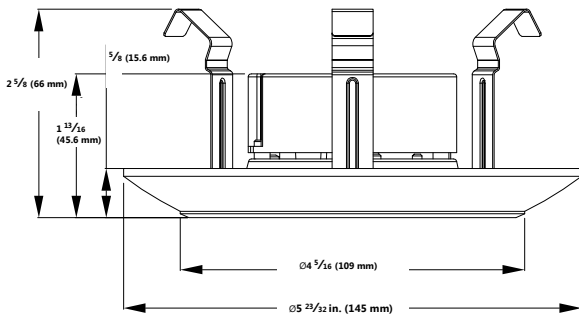


Flat Front View




Angled Front View




### 6 inch

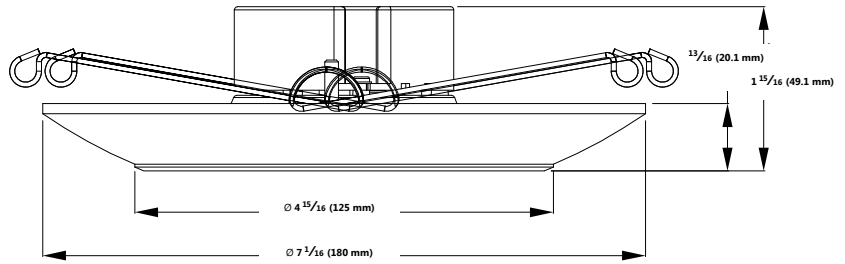

Flat Back View



Angled Back View



<sup>1</sup> Life rating based on L70 lumen depreciation design criteria. Average life of downlight that have been approved for ENERGY STAR early submission or complete submission can vary. ENERGY STAR early submission dictates that manufacturers can only claim 40 000 hour life with 3 000 hour actual life test data, 6 000 hour LM-80 data and in-situ temperature measurements. Once a product has been fully qualified, manufacturers may increase the lifetime of a product by demonstrating full compliance with the ENERGY STAR criteria at the new lifetime with lumen maintenance at the minimum required test period.

<sup>2</sup> Typical lumens +/- 10 %

<sup>3</sup> For a complete list of compatible dimmers, housings and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)