

# Low Profile LED Downlights



## LPDL

**The perfect solution when space is limited.**

The LPDL downlights are perfect for all types of small spaces and suitable for almost any residential or commercial indoor lighting applications.

- ▶ Solving the problem of limited ceiling space with a thickness of less than 1"!
- ▶ Variety of options for shapes, finishes and colour temperatures.
- ▶ Installation completed within minutes.
- ▶ Dimmable
- ▶ ASTM airtight rating
- ▶ IC rated
- ▶ Fire rated FT4 wires (UL 2464)



QUICK  
CONNECT



AIR TIGHT



IC  
RATED



DAMP



NO  
MERCURY



5  
YEARS  
WARRANTY



RoHS  
COMPLIANT



DIMMABLE



ENERGY STAR



ETL  
US




FCC

**STANDARD**<sup>®</sup>

# Low Profile LED Downlights

## The perfect solution when space is limited.

Thanks to a sleek design, the LPDL gives you all the flexibility you need for installation, especially in confined areas or when facing constraints such as wood beams, ceiling joists or air ducts. With a thin profile and multiple driver installation options, there is no need for compromise! Install the Low Profile Downlight exactly where you want it!

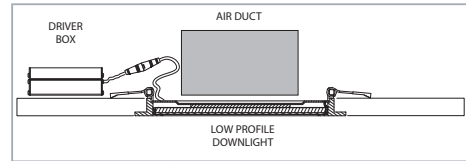

Order code	Description	Watts (W)	Colour	Volts (VAC)	Colour temp. (K)	CRI	Average life <sup>1</sup> (hrs)	Initial lumens <sup>2</sup> (lm)	Traditional equivalent (W)	Beam angle (°)	Dimmable <sup>3</sup> (Yes/No)	Case qty
------------	-------------	-----------	--------	-------------	------------------	-----	---------------------------------	----------------------------------	----------------------------	----------------	--------------------------------	----------

### 4" Round Downlight

MOL: 1<sup>3</sup>/<sub>16</sub> in. (21 mm) DIA: 4 2<sup>3</sup>/<sub>32</sub> in. (120.5 mm)

63879	LPDL4/RND/9W/27K/WH/STD	9	White	120	2 700	80	40 000	510	50	120	Y	1/24
63882	LPDL4/RND/9W/30K/WH/STD	9	White	120	3 000	80	40 000	530	50	120	Y	1/24
63884	LPDL4/RND/9W/30K/SLV/STD	9	Brushed Nickel	120	3 000	80	40 000	530	50	120	Y	1/24
63883	LPDL4/RND/9W/30K/BLK/STD	9	Black	120	3 000	80	40 000	530	50	120	Y	1/24
63885	LPDL4/RND/9W/40K/WH/STD	9	White	120	4 000	80	40 000	550	50	120	Y	1/24
63887	LPDL4/RND/9W/40K/SLV/STD	9	Brushed Nickel	120	4 000	80	40 000	550	50	120	Y	1/24
63886	LPDL4/RND/9W/40K/BLK/STD	9	Black	120	4 000	80	40 000	550	50	120	Y	1/24

### 6" Round Downlight

MOL: 1<sup>3</sup>/<sub>16</sub> in. (21 mm) DIA: 6 1/8 in. (174.5 mm)

63864	LPDL6/RND/12W/30K/WH/STD	12	White	120	3 000	80	40 000	780	60	120	Y	1/24
63867	LPDL6/RND/12W/40K/WH/STD	12	White	120	4 000	80	40 000	820	60	120	Y	1/24
63866	LPDL6/RND/12W/30K/SLV/STD	12	Brushed Nickel	120	3 000	80	40 000	780	60	120	Y	1/24
63869	LPDL6/RND/12W/40K/SLV/STD	12	Brushed Nickel	120	4 000	80	40 000	820	60	120	Y	1/24


### 4" Square Downlight

MOL: 1<sup>3</sup>/<sub>16</sub> in. (21 mm) DIA: 4 2<sup>3</sup>/<sub>32</sub> in. (120.5 mm)

63891	LPDL4/SQR/9W/30K/WH/STD	9	White	120	3 000	80	40 000	530	50	120	Y	1/24
63893	LPDL4/SQR/9W/30K/SLV/STD	9	Brushed Nickel	120	3 000	80	40 000	530	50	120	Y	1/24

## Accessories

Order Code	Description	Type
62676	RF/ACC/4/MOUNT. PLATE/SQR/STD	4" square mounting plate
64263	RF/ACC/6/MOUNT. PLATE/SQR/STD	6" square mounting plate
62677	RF/ACC/4/MOUNT. PLATE/ADJ/STD	4" adjustable mounting plate
64921	RF/ACC/6/MOUNT. PLATE/ADJ/STD	6" adjustable mounting plate
62678	RF/ACC/4/MOUNT. PLATE/HANG.BARS/STD	4" mounting plate with hanger bars
64264	LPDL/ACC/6FT/EXTCABLE/STD	6' extension cord



Life rating based on L70 lumen depreciation design criteria. Average life of lamps that have been approved for ENERGY STAR. Typical lumens +/- 5%

**STANDARD**<sup>®</sup>