


Veloce 4

The Veloce 4 - 13 W replaces
a 20 W HID metal halide
lamp or 26 W CFL plug-in lamp.


45° Beam Angle - Clear lens

Order Code	Description	Watts (W)	Colour Temp. (K)	CBCP	Delivered Lumens (lm)	Unified Glare Rating (UGR)	Lumens Per Watt	Power Factor	Case Qty
Silver Baffle									
64744	VELOCE4/MOD/13W/30K/45/SLV/STD	13	3 000	1 648	1 000	15	63	0.9	1 / 4
64745	VELOCE4/MOD/13W/35K/45/SLV/STD	13	3 500	1 781	1 000	17	63	0.9	1 / 4
64746	VELOCE4/MOD/13W/40K/45/SLV/STD	13	4 000	1 756	1 000	17	63	0.9	1 / 4
Black Baffle									
64750	VELOCE4/MOD/13W/30K/45/BLK/STD	13	3 000	1 648	1 000	15	63	0.9	1 / 4
64751	VELOCE4/MOD/13W/35K/45/BLK/STD	13	3 500	1 781	1 000	17	63	0.9	1 / 4
64752	VELOCE4/MOD/13W/40K/45/BLK/STD	13	4 000	1 756	1 000	17	63	0.9	1 / 4
White Baffle									
64756	VELOCE4/MOD/13W/30K/45/WH/STD	13	3 000	1 648	1 000	15	63	0.9	1 / 4
64757	VELOCE4/MOD/13W/35K/45/WH/STD	13	3 500	1 781	1 000	17	63	0.9	1 / 4
64758	VELOCE4/MOD/13W/40K/45/WH/STD	13	4 000	1 756	1 000	17	63	0.9	1 / 4



64744 - 64750 - 64756

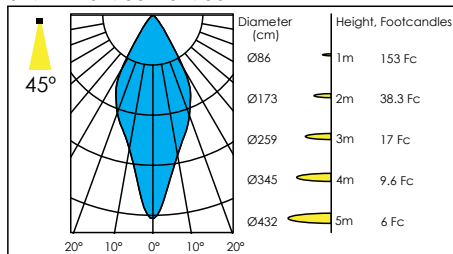

64745 - 64751 - 64757

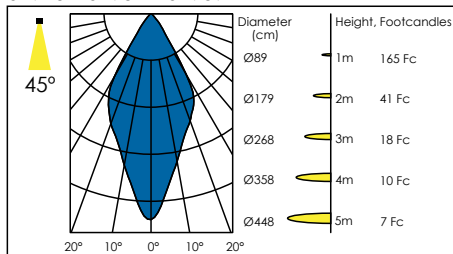


64746 - 64752 - 64758

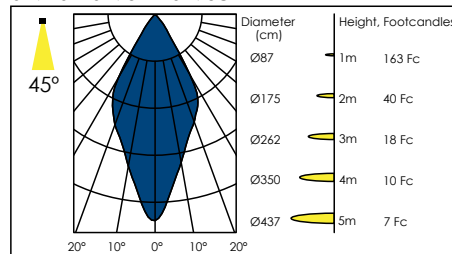


70° Beam Angle - Frosted lens

Order Code	Description	Watts (W)	Colour Temp. (K)	CBCP	Delivered Lumens (lm)	Unified Glare Rating (UGR)	Lumens Per Watt	Power Factor	Case Qty
Silver Baffle									
64747	VELOCE4/MOD/F/13W/30K/70/SLV/STD	13	3 000	599	830	22	52	0.9	1 / 4
64748	VELOCE4/MOD/F/13W/35K/70/SLV/STD	13	3 500	624	830	22	52	0.9	1 / 4
64749	VELOCE4/MOD/F/13W/40K/70/SLV/STD	13	4 000	643	830	23	52	0.9	1 / 4
Black Baffle									
64753	VELOCE4/MOD/F/13W/30K/70/BLK/STD	13	3 000	599	830	22	52	0.9	1 / 4
64754	VELOCE4/MOD/F/13W/35K/70/BLK/STD	13	3 500	624	830	22	52	0.9	1 / 4
64755	VELOCE4/MOD/F/13W/40K/70/BLK/STD	13	4 000	643	830	23	52	0.9	1 / 4
White Baffle									
64759	VELOCE4/MOD/F/13W/30K/70/WH/STD	13	3 000	599	830	22	52	0.9	1 / 4
64760	VELOCE4/MOD/F/13W/35K/70/WH/STD	13	3 500	624	830	22	52	0.9	1 / 4
64761	VELOCE4/MOD/F/13W/40K/70/WH/STD	13	4 000	643	830	23	52	0.9	1 / 4




64747 - 64753 - 64759

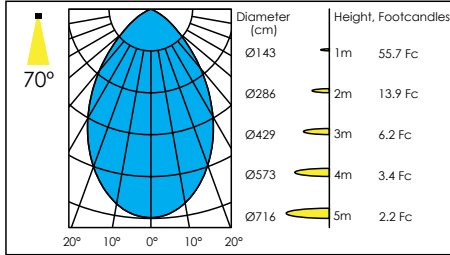

64748 - 64754 - 64760

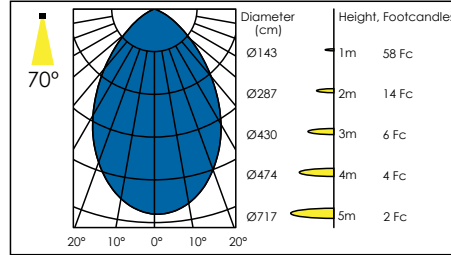

64749 - 64755 - 64761

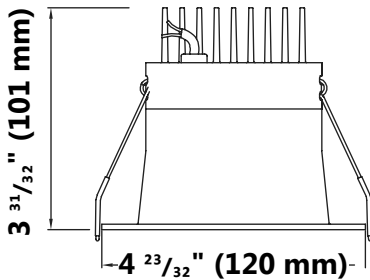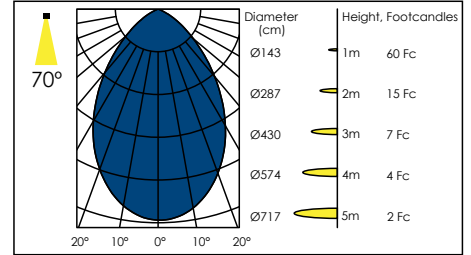

Cutting Diameter


3 17/32" (90 mm)
up to 4 1/4" (100 mm)

Driver

Driver	System Watts (W)	Maximum Load (W)	Input Voltage (VAC)	Output Voltage (VAC)	Input Current (Ma)
Veloce 4 - Driver	16	18	120 - 277	30-42	350

Accessories

Order code	Description	Opening diameter (in.)	Case qty
Mounting Plates			
62676	RF/ACC/4/MOUNT. PLATE/SQR/STD	4 1/4	1 / 100
62677	RF/ACC/4/MOUNT. PLATE/ADJ/STD	4 1/4	1 / 50
Mounting Plates with Hanger Bars			
62678	RF/ACC/4/MOUNT. PLATE/HANG.BARS/STD	4 1/4	1 / 20
Insulated Box with Hanger Bars			
62672	RF/ACC/INSULATED BOX/3_4.5/STD	3 - 4 1/2	1 / 4

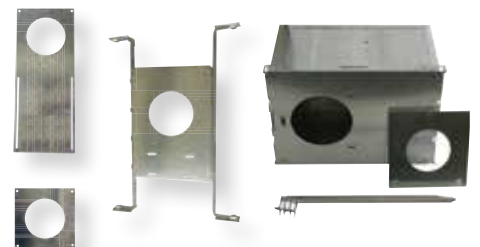

For a complete list of compatible dimmers, please visit www.standardpro.com

¹ Veloce 4 can be used in insulated ceilings only when combined with the insulated box (62672).