

# Veloce 6


The Veloce 6 - 18 W replaces a 35 W HID metal halide lamp or 2 x 26 W CFL PL fixture.

The Veloce 6 - 26 W replaces a 50 W HID metal halide lamp or 2 x 32 W CFL PL fixture.


## 45° Beam Angle - Clear lens

| Order Code           | Description                    | Watts (W) | Colour Temp. (K) | CBCP  | Delivered Lumens (lm) | Unified Glare Rating (UGR) | Lumens Per Watt | Power Factor | Case Qty |
|----------------------|--------------------------------|-----------|------------------|-------|-----------------------|----------------------------|-----------------|--------------|----------|
| <b>Silver Baffle</b> |                                |           |                  |       |                       |                            |                 |              |          |
| 64762                | VELOCE6/MOD/18W/35K/45/SLV/STD | 18        | 3 500            | 2 328 | 1 660                 | 20                         | 76              | 0.9          | 1 / 4    |
| 64763                | VELOCE6/MOD/18W/40K/45/SLV/STD | 18        | 4 000            | 2 364 | 1 660                 | 20                         | 76              | 0.9          | 1 / 4    |
| 64774                | VELOCE6/MOD/26W/35K/45/SLV/STD | 26        | 3 500            | 3 121 | 2 250                 | 21                         | 76              | 0.9          | 1 / 4    |
| 64775                | VELOCE6/MOD/26W/40K/45/SLV/STD | 26        | 4 000            | 3 237 | 2 250                 | 21                         | 76              | 0.9          | 1 / 4    |
| <b>Black Baffle</b>  |                                |           |                  |       |                       |                            |                 |              |          |
| 64766                | VELOCE6/MOD/18W/35K/45/BLK/STD | 18        | 3 500            | 2 328 | 1 660                 | 20                         | 76              | 0.9          | 1 / 4    |
| 64767                | VELOCE6/MOD/18W/40K/45/BLK/STD | 18        | 4 000            | 2 364 | 1 660                 | 20                         | 76              | 0.9          | 1 / 4    |
| 64778                | VELOCE6/MOD/26W/35K/45/BLK/STD | 26        | 3 500            | 3 121 | 2 250                 | 21                         | 76              | 0.9          | 1 / 4    |
| 64779                | VELOCE6/MOD/26W/40K/45/BLK/STD | 26        | 4 000            | 3 237 | 2 250                 | 21                         | 76              | 0.9          | 1 / 4    |
| <b>White Baffle</b>  |                                |           |                  |       |                       |                            |                 |              |          |
| 64770                | VELOCE6/MOD/18W/35K/45/WH/STD  | 18        | 3 500            | 2 328 | 1 660                 | 20                         | 76              | 0.9          | 1 / 4    |
| 64771                | VELOCE6/MOD/18W/40K/45/WH/STD  | 18        | 4 000            | 2 364 | 1 660                 | 20                         | 76              | 0.9          | 1 / 4    |
| 64782                | VELOCE6/MOD/26W/35K/45/WH/STD  | 26        | 3 500            | 3 121 | 2 250                 | 21                         | 76              | 0.9          | 1 / 4    |
| 64783                | VELOCE6/MOD/26W/40K/45/WH/STD  | 26        | 4 000            | 3 237 | 2 250                 | 21                         | 76              | 0.9          | 1 / 4    |


64762 - 64766 - 64770

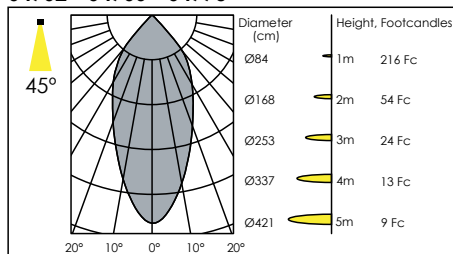


64763 - 64767 - 64771

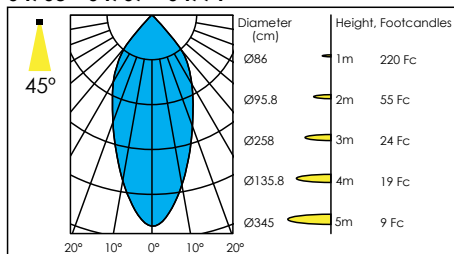

64774 - 64778 - 64782

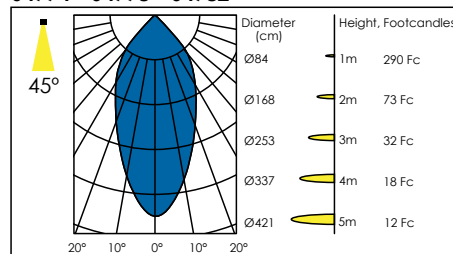

64775 - 64779 - 64783

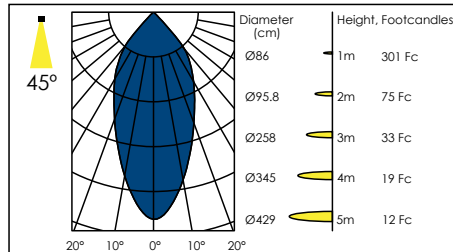

LOW UNIFIED  
GLARE RATING



INDOOR



DRY



CRI  
90+



DIMMABLE  
1-10 V



IP40  
RATING



5  
YEARS  
WARRANTY



FC




ETL  
US

# 70° Beam Angle - Frosted lens




| Order Code           | Description                      | Watts (W) | Colour Temp. (K) | CBCP  | Delivered Lumens (lm) | Unified Glare Rating (UGR) | Lumens Per Watt | Power Factor | Case Qty |
|----------------------|----------------------------------|-----------|------------------|-------|-----------------------|----------------------------|-----------------|--------------|----------|
| <b>Silver Baffle</b> |                                  |           |                  |       |                       |                            |                 |              |          |
| 64764                | VELOCE6/MOD/F/18W/35K/70/SLV/STD | 18        | 3 500            | 980   | 1 470                 | 24                         | 67              | 0.9          | 1 / 4    |
| 64765                | VELOCE6/MOD/F/18W/40K/70/SLV/STD | 18        | 4 000            | 959   | 1 470                 | 24                         | 67              | 0.9          | 1 / 4    |
| 64776                | VELOCE6/MOD/F/26W/35K/70/SLV/STD | 26        | 3 500            | 1 331 | 2 000                 | 24                         | 67              | 0.9          | 1 / 4    |
| 64777                | VELOCE6/MOD/F/26W/40K/70/SLV/STD | 26        | 4 000            | 1 407 | 2 000                 | 24                         | 67              | 0.9          | 1 / 4    |
| <b>Black Baffle</b>  |                                  |           |                  |       |                       |                            |                 |              |          |
| 64768                | VELOCE6/MOD/F/18W/35K/70/BLK/STD | 18        | 3 500            | 980   | 1 470                 | 24                         | 67              | 0.9          | 1 / 4    |
| 64769                | VELOCE6/MOD/F/18W/40K/70/BLK/STD | 18        | 4 000            | 959   | 1 470                 | 24                         | 67              | 0.9          | 1 / 4    |
| 64780                | VELOCE6/MOD/F/26W/35K/70/BLK/STD | 26        | 3 500            | 1 331 | 2 000                 | 24                         | 67              | 0.9          | 1 / 4    |
| 64781                | VELOCE6/MOD/F/26W/40K/70/BLK/STD | 26        | 4 000            | 1 407 | 2 000                 | 24                         | 67              | 0.9          | 1 / 4    |
| <b>White Baffle</b>  |                                  |           |                  |       |                       |                            |                 |              |          |
| 64772                | VELOCE6/MOD/F/18W/35K/70/WH/STD  | 18        | 3 500            | 980   | 1 470                 | 24                         | 67              | 0.9          | 1 / 4    |
| 64773                | VELOCE6/MOD/F/18W/40K/70/WH/STD  | 18        | 4 000            | 959   | 1 470                 | 24                         | 67              | 0.9          | 1 / 4    |
| 64784                | VELOCE6/MOD/F/26W/35K/70/WH/STD  | 26        | 3 500            | 1 331 | 2 000                 | 24                         | 67              | 0.9          | 1 / 4    |
| 64785                | VELOCE6/MOD/F/26W/40K/70/WH/STD  | 26        | 4 000            | 1 407 | 2 000                 | 24                         | 67              | 0.9          | 1 / 4    |


**64764 - 64768 - 64772**

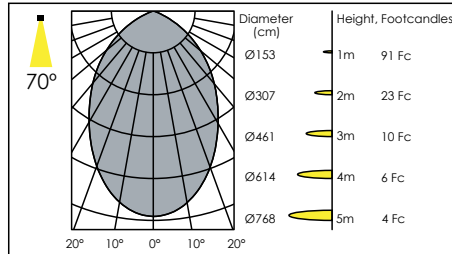




**64765 - 64769 - 64773**

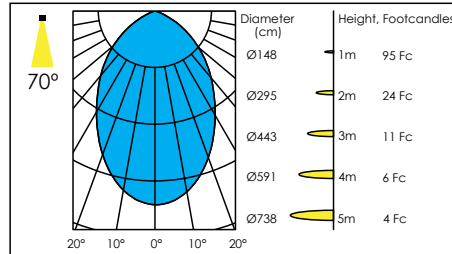

**64776 - 64780 - 64784**

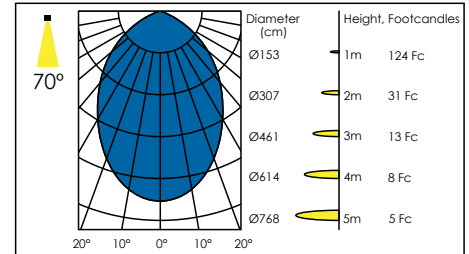

**64777 - 64781 - 64785**

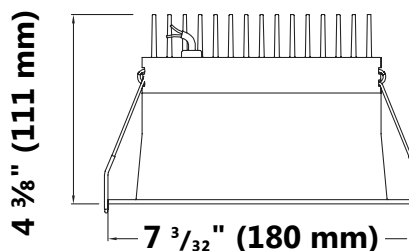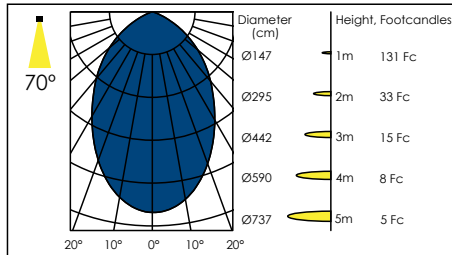

## Driver

|                          | System Watts (W) | Maximum Load (W) | Input Voltage (VAC) | Output Voltage (VAC) | Input Current (Ma) |
|--------------------------|------------------|------------------|---------------------|----------------------|--------------------|
| Veloce 6 (18 W) - Driver | 22               | 36               | 120 - 277           | 30-42                | 500                |
| Veloce 6 (26 W) - Driver | 30               | 36               | 120 - 277           | 30-42                | 700                |

## Mounting Plates

| Order code      | Description                    | Opening diameter (in.) | Case qty |
|-----------------|--------------------------------|------------------------|----------|
| Mounting Plates |                                |                        |          |
| 64263           | LPDL/ACC/6INRDN/MOUNTPLATE/STD | 6                      | 1 / 96   |
| 64921           | RF/ACC/6/MOUNT.PLATE/ADJ/STD   | 6                      | 1 / 24   |



## Cutting Diameter



6" (150 mm) up to  
6 5/8" (165 mm)

For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)