




Combining a comfortable, pleasing atmosphere with energy efficiency is now possible with the crisp and even lighting provided by STANDARD's LED Omni lamps. Create the perfect ambience with these smooth dimming lamps.

LED Omni lamps deliver a brighter look and provide the same even, crisp and comfortable lighting as traditional 40 W, 60 W, 75 W and 100 W incandescent lamps. Choose from a wide selection of colour temperatures to obtain the desired lighting effect.

The LED trilight lamps are ideal to transition from task to ambience lighting with one lamp. These lamps are equivalent to traditional 100 W incandescent. They are perfect in applications such as table lamps and floor lamps.

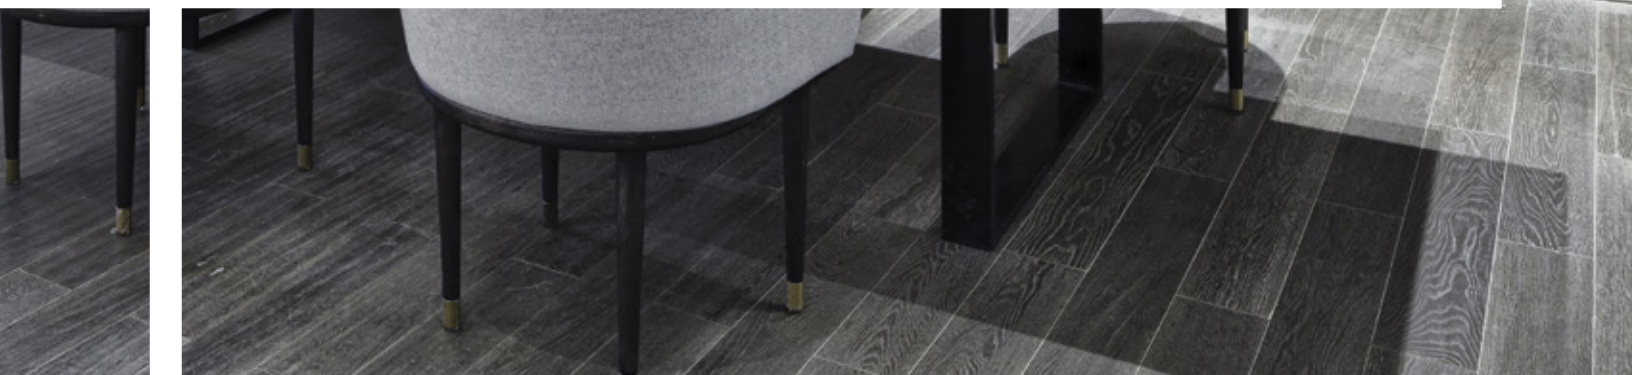

A19



A19 (GU24)



A21



A21 Trilight



Order code	Description	Watts (W)	Base	Volts (VAC)	Colour temp. (K)	Finish	CRI	Average life L70 ¹ (hrs)	Initial lumens ² (lm)	Dimmable ³ (Y/N)	Traditional equivalent (W)	Case qty (inner/master)
------------	-------------	-----------	------	-------------	------------------	--------	-----	-------------------------------------	----------------------------------	-----------------------------	----------------------------	-------------------------

A19 Omni

40 W equivalent

MOL : 3 7/8 in. (99 mm) Dia. : 2 3/16 in. (55 mm)

64809	LED/OMNI/S3/5.5W/27K/STD	5.5	E26	120	2 700	Frost	81	25 000	455	Y	40	1/60
64810	LED/OMNI/S3/5.5W/30K/STD	5.5	E26	120	3 000	Frost	83	25 000	521	Y	40	1/60
64811	LED/OMNI/S3/5.5W/40K/STD	5.5	E26	120	4 000	Frost	83	25 000	563	Y	40	1/60
64812	LED/OMNI/S3/5.5W/50K/STD	5.5	E26	120	5 000	Frost	86	25 000	545	Y	40	1/60

60 W equivalent

MOL : 4 7/16 in. (112 mm) Dia. : 2 3/8 in. (60 mm)

64805	LED/OMNI/S3/9.5W/27K/STD	9.5	E26	120	2 700	Frost	81	25 000	832	Y	60	1/60
64806	LED/OMNI/S3/9.5W/30K/STD	9.5	E26	120	3 000	Frost	83	25 000	879	Y	60	1/60
64807	LED/OMNI/S3/9.5W/40K/STD	9.5	E26	120	4 000	Frost	83	25 000	881	Y	60	1/60
64808	LED/OMNI/S3/9.5W/50K/STD	9.5	E26	120	5 000	Frost	85	25 000	861	Y	60	1/60

60 W equivalent - GU24

MOL : 4 1/2 in. (114 mm) Dia. : 2 3/8 in. (60 mm)

63266*	LED/OMNI/9.5W/27K/GU24/STD	9.5	GU24	120	2 700	Frost	80	40 000	800	Y	60	6/24
64959	LED/OMNI/S2/9.5W/27K/GU24/STD	9.5	GU24	120	2 700	Frost	81	25 000	806	Y	60	6/48
64960	LED/OMNI/S2/9.5W/30K/GU24/STD	9.5	GU24	120	3 000	Frost	83	25 000	840	Y	60	6/48
64961	LED/OMNI/S2/9.5W/40K/GU24/STD	9.5	GU24	120	4 000	Frost	83	25 000	866	Y	60	6/48

75 W equivalent

MOL : 4 9/16 in. (116 mm) Dia. : 2 3/8 in. (60 mm)

64286	LED/OMNI/11W/27K/STD	11	E26	120	2 700	Frost	81	25 000	1 151	Y	75	6/24
64287	LED/OMNI/11W/30K/STD	11	E26	120	3 000	Frost	83	25 000	1 137	Y	75	6/24
64288	LED/OMNI/11W/40K/STD	11	E26	120	4 000	Frost	84	25 000	1 209	Y	75	6/24
64289	LED/OMNI/11W/50K/STD	11	E26	120	5 000	Frost	84	25 000	1 238	Y	75	6/24

A21 Omni

100 W equivalent

MOL : 5 9/32 in. (134 mm) Dia. : 2 3/8 in. (67 mm)

64290	LED/A21/14.5W/27K/STD	14.5	E26	120	2 700	Frost	81	25 000	1 660	Y	100	6/24
64291	LED/A21/14.5W/30K/STD	14.5	E26	120	3 000	Frost	83	25 000	1 630	Y	100	6/24
64292	LED/A21/14.5W/40K/STD	14.5	E26	120	4 000	Frost	83	25 000	1 715	Y	100	6/24
64293	LED/A21/14.5W/50K/STD	14.5	E26	120	5 000	Frost	84	25 000	1 656	Y	100	6/24

Order code	Description	Watts (W)	Base	Volts (VAC)	Colour temp. (K)	Finish	CRI	Average life L70 ¹ (hrs)	Initial lumens ² (lm)	Dimmable ³ (Y/N)	Traditional equivalent (W)	Case qty (inner/master)
------------	-------------	-----------	------	-------------	------------------	--------	-----	-------------------------------------	----------------------------------	-----------------------------	----------------------------	-------------------------

A21 Omni

Trilight⁴

MOL : 5 9/32 in. (134 mm) Dia. : 2 3/8 in. (67 mm)

64294	LED/A21/14.5W/27K/3WAY/STD	3.5 / 7 / 14.5	E26	120	2 700	Frost	81	25 000	410 / 810 / 1 613	N	40 / 60 / 100	6/24
64295	LED/A21/14.5W/30K/3WAY/STD	3.5 / 7 / 14.5	E26	120	3 000	Frost	83	25 000	410 / 810 / 1 630	N	40 / 60 / 100	6/24



¹ Life rating based on L70 lumen depreciation design criteria. Average life of lamps that have been approved for ENERGY STAR early submission or complete submission can vary. ENERGY STAR early submission dictates that manufacturers can only claim 25 000 hour life with 3 000 hour actual life test data, 6 000 hour LM-80 data and in-situ temperature measurements. Once a product has been fully qualified, manufacturers may increase the lifetime of a product by demonstrating full compliance with the ENERGY STAR criteria at the new lifetime with Lumen Maintenance at the minimum required test period.

² Typical lumens +/- 10 %

³ For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit www.standardpro.com

⁴ Trilight lamps initially light up at the highest intensity then to the lowest.

General Purpose