

ORDERING INFORMATION

Order code: 58980
 Description: F6T5/DL/PH/G5/STD
 UPC: 69549589803
 Case quantity: 100




Nominal length : 9 in. (229 mm) Dia. : 5/8 in. (16 mm)


PERFORMANCE DATA

Shape: T5
 Base: G5 (Min Bipin)
 Starting method: Preheat Start (PH)
 Wattage (W): 6
 Colour temperature (K): 6 500
 CRI: 82
 Rated life on PS/PRS¹ ballast:
 Based on a 3 hour start 6 000
 Based on a 12 hour start 8 000
 Initial lumens (lm): 240
 Mean lumens (lm): 230
 Nominal efficiency (lm/W): 40
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10

DIMENSIONS

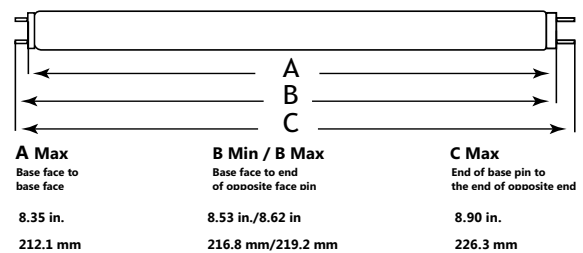

SPECTRAL DISTRIBUTION

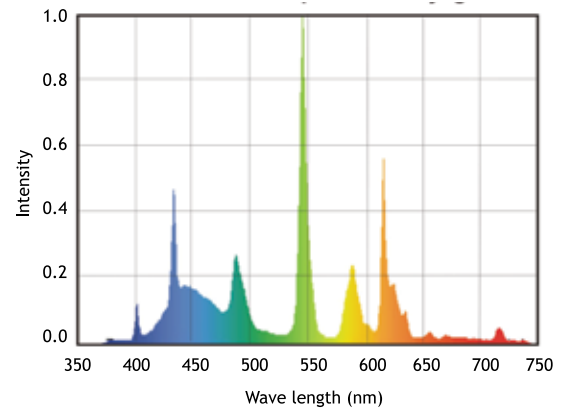

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 ballast.

